

09-1100

A

09/07/00  
JC678 U.S. PTO

Express Mail Label No. EL172582475

Docket No.: END9-2000-0110 US1

**NEW UTILITY PATENT APPLICATION TRANSMITTAL**

**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Total Pages this Submission: 3

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**System and Method for Catalog Administration Using Supplier Provided Flat Files**

and invented by:

DAVID G. RUEST, AMY J. SNAVELY, and MARK A. MUSA

**If a CONTINUATION APPLICATION,** check the appropriate box and supply the requisite information:

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

01. ☒ Filing fee as calculated and transmitted as described below

02. ☒ Specification having 84 pages and including the following:

- a. ☒ Descriptive Title of the Invention
- b. ☒ Cross References to Related Applications *(if applicable)*
- c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
- d. ☐ Reference to Microfiche Appendix *(if applicable)*
- e. ☒ Background of the Invention
- f. ☒ Brief Summary of the Invention
- g. ☒ Brief Description of the Drawings *(if drawings filed)*
- h. ☒ Detailed Description
- i. ☒ Claim(s) as Classified Below
- j. ☒ Abstract of the Disclosure

03. ☒ Drawing(s) when necessary as prescribed by 35 USC 113)

- a. ☐ Formal
- b. ☐ Informal

Number of sheets: 20

JC675 U.S. PTO  
09/657196

09/07/00

09/07/00

**NEW UTILITY PATENT APPLICATION TRANSMITTAL****(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Total Pages this Submission:3

**Application Elements (Continued)**04. ☒ Oath or Declaration

- a. ☐ Newly executed (original or copy) ☒ Not executed
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney

05. ☐ Incorporation By Reference *(usable if box 4b is checked)*

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Item 4b, is considered as being part of the disclosure of accompanying application and is hereby incorporated by reference therein.

06. ☐ Computer Program in Microfiche *(Appendix)*07. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*

- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**08. ☐ Assignment Papers *(cover sheet & document(s))*09. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*10. ☐ English Translation Document *(if applicable)*11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citation12. ☐ Preliminary Amendment13. ☒ Acknowledgment postcard14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Label No: EL172582475\_\_\_\_\_)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

**NEW UTILITY PATENT APPLICATION TRANSMITTAL****(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Total Pages this Submission:3

**Accompanying Application Parts (Continued)**

- 16.
- ☐
- Additional Enclosures (identify below)

**Fee Calculation and Transmittal****CLAIMS AS FILED**

For	# Filed	# Allowed	# Extra	Rate	Fee
Total Claims	14	-20	0	x \$18.00	\$
Indep. Claims	8	- 3	5	x \$78.00	\$ 390.00
Multiple Dependent Claims	_____				\$
				<b>BASIC FEE</b>	\$ 690.00
Other FEE (Specify purpose)					\$
				<b>TOTAL FILING FEE</b>	\$1,080.00

- ☐ A check in the amount of \$ \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit IBM Corporation Deposit Account No. 09-0457 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$1,080.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees as required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

09/07/00  
Signature

John R. Pivnichny  
Reg. No. 43,001  
IBM Corporation/N50/040-4  
1701 North Street  
Endicott, NY 13760  
Phone: (607) 755-6565

cc:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: D. G. Ruest, et al  
Serial No.: N/A Group No.: N/A  
Filed: Herewith Examiner: N/A  
For: System and Method for Catalog Administration Using Supplier Provided Flat Files

Assistant Commissioner For Patents  
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EL172582475

Date of Deposit: 09/07/00

I hereby certify that the following attached paper or fee


New Utility Patent Application Transmittal  
Specification: 84 pages (including claims)  
Declaration and Power of Attorney  
Drawings (20 sheets)

Express Mail Certificate  
Postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Georgia Y. Brundage

(Name of person mailing paper or fee)

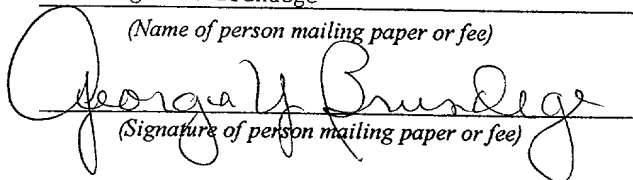  
(Signature of person mailing paper or fee)

NOTE: Each paper must have its own certificate and the "Express Mail" label number as a part thereof or attached thereto. When, as here, the certification is presented on a separate sheet, that sheet must (1) be signed and (2) fully identify and be securely attached to the paper or fee it accompanies. Identification should include the serial number and filing date of the application as well as the type of paper being filed, e.g., complete application, specification and drawings, responses to rejection or refusal, notice of appeal, etc. If the serial number of the application is not known, the identification should include at least the name of the inventor(s) and the title of the invention.

NOTE: The label number need not be placed on each page. It should, however, be placed on the first page of each separate document, such as, a new application, amendment, assignment, and transmittal letter for a fee, along with the certificate of mailing by "Express Mail". Although the label number may be on checks, such a practice is not required. In order not to deface formal drawings, it is suggested that the label number be placed on the back of each formal drawing or the drawings be accompanied by a set of informal drawings on which the label number is placed.

a:\certESPRESSmail.wpd

**APPLICATION**

**FOR**

**UNITED STATES LETTERS PATENT**

APPLICANT NAME     D. G. RUEST, ET AL.

TITLE   **System and Method for Catalog Administration  
Using Supplier Provided Flat Files**

DOCKET NO.             END9-2000-0110 US1

**INTERNATIONAL BUSINESS MACHINES CORPORATION**

**CERTIFICATE OF MAILING UNDER 37 CFR 1.10**

I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C., 20231 as "Express Mail Post Office to Addressee" on 09/07/00

Mailing Label No. EL172582475

Name of person mailing paper: Georgia Y. Brundage

Signature

Date

SYSTEM AND METHOD FOR CATALOG ADMINISTRATION USING SUPPLIER  
PROVIDED FLAT FILES

Background of the Invention

Cross References to Related Applications

5           The following U.S. patent applications filed  
concurrently herewith are assigned to the same assignee  
hereof and contain subject matter related, in certain  
respects, to the subject matter of the present application,  
the teachings of which applications are incorporated herein  
10 by this reference:

Serial No. 09/\_\_\_\_\_, entitled "System and Method for  
Clustering Servers for Performance and Load Balancing",  
assignee docket END9-2000-0104-US1;

15           Serial No. 09/\_\_\_\_\_, entitled "System and Method for Front  
End Business Logic and Validation", assignee docket END9-  
2000-0105-US1;

Serial No. 09/\_\_\_\_\_, entitled "System and Method for Data  
Transfer With Respect to External Applications", assignee

docket END9-2000-0106-US1;

Serial No. 09/\_\_\_\_\_, entitled "System and Method for Providing a Relational Database Backend", assignee docket END9-2000-0107-US1;

5      Serial No. 09/\_\_\_\_\_, entitled "System and Method for Providing a Role Table GUI via Company Group", assignee docket END9-2000-0108-US1;

10      Serial No. 09/\_\_\_\_\_, entitled "System and Method for Populating HTML Forms Using Relational Database Agents", assignee docket END9-2000-0109-US1;

Serial No. 08/\_\_\_\_\_, entitled "System and Method for Providing an Application Navigator Client Menu Side Bar", assignee docket END9-2000-0111-US1.

#### Technical Field of the Invention

15            This invention pertains to a system and method for managing a requisition catalog on the web.

#### Background Art

END9 2000 0110 US1

5 A requisition catalog for a large enterprise in a web environment must enable very fast access to a very large database from a large number of clients. A large number of clients is required for optimal performance of a catalog system. There is a need to architect such a system so as to be scalable, that is, capable of providing that fast access to an ever increasing number of clients and a growing database or collection of databases.

10 In a requisition catalog system for a large enterprise in a web environment, there is a requirement for a system and method for insuring that all general ledger accounts associated with commodities are correct, and within this requirement for providing a description from the associated accounting system for use by customer or requester to select the correct general ledger (GL) account when doing financial validation on a requisition.

20 A requisition catalog for a large enterprise is stored in a very large database. However, a Lotus Notes database has a hard limit of 2 to 4 gigabytes of data. That is, Notes puts its entire database into one big Notes standard format(.nsf) file. Information in such a .nsf file is accessed by a system geometrically. As a result, such a system slows down significantly as it accesses larger files.



This slow down ramps up rather badly. Consequently, the hard limit is artificially put in because of this ramp up in access time. The typical solution to this problem is to split a very large database into many smaller databases.

5 Lotus Notes has a Lotus connector/Lotus script extensions connector (LCLSX). This allows connection to other databases but these script extensions are not set up to actually be the database. There is a need in the art for a system and method for utilizing Lotus script extensions in  
10 combination with a relational database to provide high capacity storage without performance degradation.

In building a requisition catalog for a large enterprise with many suppliers, an automated process is needed to receive a flat file from a supplier for review by  
15 a buyer before being externalized for use by requesters. While the buyer must be able to review the contents, he must be restricted from making changes to certain sensitive fields, such as changing a unit price or a unit of measure, both of which could constitute fraud. Consequently,  
20 allowing the buyer to edit the flat file can't provide the level of security required. There is a need in the art to provide a buyer a means of auditing catalog content before externalizing it to production for access by requesters.

A requisition catalog for use in a web environment requires a very large database, such as an IBM DB2 database, and the functionality provided by, for example, a Lotus Notes server. However, a Lotus Notes access control list (ACL) can not be used control access to an IBM DB2 database, and the privileges on a DB2 table can be granted only by the table instance owner. Additionally, since Notes agents which access DB2 are running from a Notes server, the Notes server ID often has full access to all tables, and there is no way to limit that. That is, in a hybrid (Notes/DB2) environment, the user ID which accesses DB2 tables is the ID of the Notes server. Therefore, can't restrict access by a user to the DB2 tables. There is a need in the art for a system and method which allows certain users access to certain data in certain selected tables. That is, there is needed a system and method for providing very flexible access to DB2 tables without requiring database administrator (DBA) involvement to issue grants against the tables, and bypassing the problem caused by Notes agents all coming from the same user (the Notes server ID).

In a hybrid requisition catalog system for use in a web environment, much of the application data is stored in, for example, IBM DB2 tables. However, a web interface written in Java script and in HTML does not have functionality for

END9 2000 0110 US1 5

connecting to DB2 and reading data from DB2 tables. No function is provided in Java script and in HTML to connect to or access such a database. It is not presently possible to make the connection by connecting to the database and  
5 executing SQL queries. Consequently, there is a need in the art for a system and method utilizing an existing infrastructure including Lotus Notes, Domino Go, and DB2 to combine HTML and Java script web presentation with DB2 data.

In a requisition catalog system for use in a web  
10 environment by a large enterprise, there must be provide a way to deal with web sites that exist outside of a firewall, or internal applications within the firewall but outside of the requisition catalog (Req/Cat Web or RCW) application. That is, a system and method is required for transferring a  
15 large quantity of data back from such a web site or application to the RCW application in a timely manner. One possible way is to send data on the universal resource locator (URL). However, such a URL is limited to 1K bytes, which is not enough to do the task quickly for the  
20 quantities of information required. Information can be put into a frame, and that information can be read, but only if the information is written and read by the same server.

In a preferred system, the RCW application exists in a

frame set in a browser. As part of security for such a browser, Netscape and Internet Explorer (IE) establish ownership of the frames: each frame is a window under control of the browser. A user can open up a session in any frame desired. However, if all of the frames are not owned by same session, then these frames not commonly owned cannot see the contents of each other. In Netscape version 4.51 frame ownership was changed to protect against frame spoofing. Frame spoofing is a way other servers can use to trick the owner of a frame into thinking it had created a frame actually created by someone else, enabling access to data not owned. Netscape 4.51 plugs that hole.

Consequently, in the new environment (with spoofing inhibited) a problem is presented: if a RCW application needs to access an outside supplier site for information to get back through one its own the frames, as soon as data is written by that outside supplier site into one of the frames owned by RCW, ownership of the frame is transferred from RCW to the supplier; RCW no longer owns the frame and cannot access the information. A system and method is needed to enable transfer of data from a supplier site to a RCW application which does not entail frame spoofing.

In a web application, such as a requisition catalog

system for a large enterprise, a fast browser interface and navigator is needed, including a very fast graphical user interface (GUI).

There is known in the art several Internet applications which provide a strip down, for example, the left hand side of a window that has menu of items from which a user may select. Such windows also may display a header, including header type items which will expand upon selection into a drop down list. Such windows also may include a footer including leafs which will, upon selection, change what is seen on right side of screen. Such applications provide a very nice user interface for documents, with a table of contents (TOC) on the left, and on the right the selected contents.

However, these expandible and collapsible menus are characteristically slow. This slowness is a result of every click sending a request to a remote server, which server responds by sending information back to expand the list at the browser. Every click on the web is slow, involving communications of the request and response over a relatively slow web communication link. There is, therefore, a need in the art to dramatically increase the speed of operation of a graphical user interface at a browser.

It is an object of the invention to provide a scalable database system in a web environment with optimal access performance characteristics for an expanding number of clients and a growing database.

It is an object of the invention to provide a system and method for enabling a requester to select the correct general ledger account when doing financial validation on a requisition.

It is an object of the invention to provide a system and method for utilizing Lotus script extensions in combination with a relational database to provide high capacity storage without performance degradation.

It is an object of the invention to provide a system and method for enabling a buyer a means for editing catalog content before externalizing it to production for access by requesters.

It is an object of the invention to provide a system and method for providing very flexible access to DB2 tables without requiring database administrator (DBA) involvement to issue grants against the tables, and bypassing the

problem caused by Notes agents all coming from the same user  
(the Notes server ID).

It is an object of the invention to provide a system  
and method utilizing an existing infrastructure including  
5 Lotus Notes, Domino Go, and DB2 to combine HTML and Java  
script web presentation with DB2 data.

It is an object of the invention to provide a system  
and method for enabling transfer of data from a supplier  
site to a RCW application which does not entail frame  
10 spoofing.

It is an object of the invention to provide a system  
and method for dramatically increasing the speed of  
operation of a navigation frame of a GUI.

### **Summary of the Invention**

15 A system and method for publishing a catalog. A flat  
file catalog is received via EDI a supplier and loaded into  
a DB2 staging table. A buyer is granted audit control over

selected fields in the staging table catalog, access to other fields is restricted. A DB2 production table is updated from the DB2 staging table; and user read access is granted to the DB2 production table.

5           Other features and advantages of this invention will become apparent from the following detailed description of the presently preferred embodiment of the invention, taken in conjunction with the accompanying drawings.

### **Brief Description of the Drawings**

10           Figure 1 is a high level system diagram illustrating a clustered configuration of servers for performance and load balancing.

            Figure 2 is a diagram illustrating proxying out of URLs to clustered servers.

15           Figure 3 is a system diagram illustrating a specific example of a clustered configuration of servers.

            Figure 4 is a diagram illustrating the frames



comprising a typical screen display.

Figure 5 is a diagram illustrating a specific instance of the display of Figure 4.

Figure 6 is a diagram illustrating ZIP code validation.

5        Figure 7 is a diagram illustrating requisition catalog searching.

Figure 8 is a diagram illustrating the mapping of commodity codes to accounting codes.

10       Figure 9 is a diagram illustrating a commodity document.

Figure 10 is a diagram illustrating a pyramid structure of application program interfaces.

15       Figure 11 is a diagram illustrating the graphical, database, and business logic API's of the pyramid structure of Figure 10.

Figure 12 is a diagram illustrating the interaction of API's with each other, a database, and a browser.

Figure 13 is a diagram illustrating an example configuration of API's.

Figure 14 is a flow diagram illustrating the operation of the userProfile class of Figure 13.

5        Figure 15 is a system diagram illustrating the system of Figure 1 for accessing a requisition catalog.

Figure 16 is a system diagram illustrating a system for using a staged requisition catalog built from supplier flat catalog files.

10       Figure 17 is a flow diagram illustrating the steps for receiving a supplier flat catalog.

Figure 18 is a flow diagram illustrating the steps executed by an application server and database server for building and accessing a requisition catalog.

15       Figure 19 is a diagram illustrating a user profile.

Figure 20 is a diagram illustrating a Notes agent for building an HTML page from a DB2 table.

Figure 21 is a diagram illustrating Notes agents for transferring data to an application browser session from a supplier window.

### **Best Mode for Carrying Out the Invention**

5

#### *1. Clustered Servers*

10 In accordance with the preferred embodiment of the invention, a requisition catalog system (RCW, or Rec/Cat Web) is provided within a global web architecture (GWA) infrastructure. Such an architecture provides for the large number of clients required to assure good performance. In an exemplary embodiment, the requisition catalog application is deployed within the IBM web domain, which requires the use of GWA for clustering of W3 and www.ibm.com web sites. This architected solution assures a scalable Req/Cat Web application.

15

Referring to Figure 1, client browsers 100 are connected to a GWA infrastructure including network dispatcher 102 and domino.go, a virtual cluster of Domino servers. Network dispatcher 102, sprays out or dispatches

requests among configured servers S1, S2, S3 in virtual  
server cluster 104. Communications from cluster 104 are, in  
turn, dispatched (also referred to as sprayed out,  
distributed, proxy passed, or redirected) by network  
5 dispatcher 106 among servers S4, S5, and S6 in Domino  
cluster 112. While three servers are illustrated as  
configured in each of clusters 104 and 112, each cluster  
configuration may be scaled to any number of servers.  
External objects 108, which can be stored on a distributed  
10 file system (.dfs), include graphic files, Java files, HTML  
images, net.data macros, and other .nsf files external to  
Domino, and in particular include configuration file proxy  
statements 110. In this instance, external objects 108 are  
stored on a .dfs and exist only once, so it is not necessary  
15 to replicate all of the external objects to each of the  
servers S4-S6. External objects 108, served in a .dfs are  
graphic files, Java files, anything that would live outside  
of the server files (also referred to .nsf files) S4-S6,  
including HTML images and net.data macros. These are part  
20 of the code implementing the Req/Cat Web application of the  
preferred embodiment of the invention, but are not part of  
Domino code, and are primarily for the GUI. By storing them  
outside of cluster servers 112, performance is improved.

In order to avoid potential bottlenecks on the

clustered Domino servers 112 and in order to store a larger amount of data than is quickly searchable in Domino, a relational database 129, such as the IBM DB2 database, is used to store configuration data. Data is written by the clustered servers 112 by the end user, or by batched programs stored on application server 114 that are receiving data from back-end systems 116.

Referring to Figure 2, in accordance with the invention, a proxy pass is used with both domino.go cluster 104 and Domino cluster 112. In accordance with a proxy pass, when a URL 120 is passed to network dispatcher 106, the NP processes that out and sprays it to any one of the configured servers. Spray means to distribute or map a URL 120 to any one of these configured servers S1-S3, S4-S6, which is the effect of mapping, as is represented by line 126, URL 120 to any of S4, S5, S6 in cluster 112. Examples of URLs include <w3.ibm.com/\*>, <www.ibm.com/\*>, and <w3.ibm.com/transform/reqcat/?opendatabase rccreate>.

In accordance with the invention, a unique architecture for a requisition catalog system includes a hybrid application using external objects 108 in a distributed file system off of the domino.go cluster 104 that works with network dispatcher 106 and the proxy pass capability 110 to

redirect traffic to the Domino cluster 112.

5       These servers S4-S6 are mirror images: each has same  
      .nsf files. Periodically, these servers replicate back and  
      forth so that information is contained in all of them. Data  
      is kept consistent.

10       In operation, when a client comes in through browser  
      100, his request can be directed to any domino.go server S1-  
      S3 that determines the mapping of the URL request and what  
      type of function is needed (displaying of images or code  
      execution on S1-S3, or connecting to an .nsf server S4-S6 to  
      display user data).

15       .nsf servers S4-S6 then feed requests to the  
      application server 114, which in this embodiment is a  
      backend Req/Cat Web (RCW) server to which all data gets  
      replicated and where the bridges and agents run. Data gets  
      replicated out to other back-end servers (DB2, MVS, SAP) 116  
      as needed. A bridge is an application that transfers data  
      from one server to another server. An agent is an  
      application that runs scheduled or by request to do some  
20       processing of data.

      In an exemplary embodiment, Domino.go, or virtual

server cluster, 104 is part of the GWA infrastructure. Any  
w3.ibm.com or www.ibm.com must go through a domino.go  
cluster 104. In accordance with the present invention a  
proxy out to the Domino cluster 112 is also provided. The  
5 purpose of this is to improve scalability and performance.  
Proxy statements 110 are used to ensure that the proper  
pieces of the application are invoked as appropriate,  
depending upon what the end user is doing. These statements  
are a mapping through a configuration file of URL 120 to any  
10 clustered server 112.

Referring to Figure 3, a specific exemplary embodiment  
of the invention includes client browser 100 connected to  
network dispatcher (URL redirect) 102, which is connected to  
GWA shared GO cluster (W3-1.IBM.COM) 104. Cluster 104 is  
15 connected to external objects including OBI 117 and DFS 118,  
to dedicated DB2 server 129, and to network dispatcher  
(proxy) 106. Dispatcher 106 is connected to dedicated  
Domino "end user" cluster 112. Cluster 112 is connected to  
Blue Pages database 121 (an internal personnel database),  
20 dedicated DB2 server 129, dedicated Domino "application"  
server 114, and other Notes databases 119, including Skills  
Matching (an application for contracting technical  
services), AMNF (an application for identifying nonmanager  
requisition approvers), and public address book (PAB, for

user login and authentication). Application server 114 is connected to FormWave 125 (an application that does approval form routing), PRISM/Copics 123 (which are requisition feeder systems on MVS and AS/400), SAP 382 (an ERP, or enterprise resource planning system, including an accounting application having an accounts payable function), dedicated content staging server 127 where an administration Notes client 128 runs, and dedicated DB2 server 129. The content staging server is used to update both .nsf and DB2 configuration data, and is also connected to server 129.

The architecture of Figure 3 presents a complex, scalable global procurement application (referred to as Req/Cat Web) implemented within Global Web Architecture (GWA). Req/Cat Web allows customers to generate on-line, general procurement requisitions. Customers interfacing client browser 100 can search through vendor catalogs to select items and fill in order information. Submitted requisitions are routed through an approval process using FormWave 125. Requisitions that have been approved are sent to a back-end system (SAP) 382, where a purchase order is cut and billing occurs. Customers can monitor their requisition status, as the back end sends status updates to the application 114.



Technologies utilized in building Req/Cat Web include the following: Domino.Go 104 provides a proxy passing function and caching facility. Lotus Notes/Domino is used for its security and workflow capabilities. DB2 provides rich relational database functions and data management. Net.Data is used for its catalog searching functionality. Javascript is used for GUI presentation and data verification. Req/Cat Web application code sits on DFS 118, on the Domino cluster servers 112, and on Domino application server 114.

Architectural elements include load balancing, file storage, end-user front end (which reside in the Domino cluster servers 112), back-end processing, external dependencies, and use of frames.

For load balancing, Req/Cat Web uses the GWA proxy pass architecture, documented in the presentation currently available on the Notes/Web application CoC Web site at <http://w3.coc.ibm.com/coc/cocweb.nsf/Homepages/gwatrain.html>.

Network dispatchers 102, 106 are used between the client 100 and the Domino.Go cluster 104 and also between the Domino.Go cluster 104 and Domino cluster 112 to automatically balance the load of http requests among

servers S1-S3 and S4-S6. Configuration file (httpd.conf) 110 contains the proxy statements that are used for redirections. When a client 100 enters the url (w3.ibm.com/transform/reqcat) and Network dispatcher 106  
5 redirects the client to the appropriate server 112, the redirection is transparent to the client.

Workload is split between Domino.Go 104 and Domino 112 to improve performance.

10 File storage is provided by dynamic file system (.dfs, or DFS) 118, which contains javascript files (.js), html, images, and net.data macros. Domino servers 114 contain navigation, configuration, create requisition, open requisition, requisition invoice paid, requisition archive, cost center, confirmations, and help databases. DB2 server  
15 129 contains tables including: confirmations, user profiles, zip codes, accounting data, commodity configuration data, buyer information, routing, and catalogs.

An end-user front end for Req/Cat Web uses Domino authentication to permit login to the application. The  
20 client uses his Lotus Notes ID and pre-set http password to "authenticate". When a client logs in at browser 100, the Domino servers 112 (S4-S6) are configured to check the name

and password in public address book 119, which is a  
designated server within GNA. In a further exemplary  
embodiment, secure login function may be provided through  
the implementation of digital certificates. Data is  
5 retrieved from DB2 129 using LC:LSX calls via Notes agents,  
or Net.Data. Net.Data is used for a catalog searching and  
drill-down function. Java APIs are used for information  
retrieval from BluePages 121.

As much processing as possible is performed  
10 asynchronously on the back-end, application server 114.  
Bridge jobs are scheduled on two levels: system level (CRON)  
and notes level (Agents). Agents run periodically, say  
hourly, to process requisitions and send them to SAP 382.  
Other agents are scheduled off-peak, where ever possible.

15 External dependencies include FormWave for form  
approval routing, BluePages for personal data for user  
profile creation and approver changes, interfaces to Open  
Buying on the Internet (OBI) server and skill matching  
applications, and SAP for receiving requisitions for  
20 purchase order (PO) creation and processing. Information  
returned by SAP to Req/Cat Web includes requisition status,  
PO/RFS status, PO history, negative confirmations, currency  
codes, and configuration information.

By using frames, a large majority of preprocessing can be performed dynamically, on the client, reducing the number of trips back and forth to the server. This is a tremendous boost to performance. The web screen described hereafter is not the result of a Notes form, but rather of a dynamically generated HTML/javascript code produced by a displayReqHeader() function. This function dynamically writes html and javascript code into the content frame of the application. The javascript function is coded in a displayreq.js file stored on the filesystem and loaded into a jsCode frame by a source (<script src= "../js/displayreq.js">) command in a jscode.html file at the time when the initial frameset is loading. A displayReqHeader() function is called from several places in the application to redisplay the requisition information in the content frame. This screen is called any time a WebReq Lotus Notes form is opened by an OpenForm command for a new requisition, or by an OpenDocument command when an existing document is opened. OpenForm occurs when the displayReqHeader() javascript function is called as the last part of an OnLoad event coded in the HTML-Attributes property of the WebReq form. Any time an existing document is opened that was saved with Form-WebReq, the OnLoad event causes the displayReqHeader() javascript to be run to OpenDocument. Any time a content frame has been loaded with some other page during the

processing of a requisition, and the user performs an action  
to return to the requisition in process, the  
displyReqHeader() javascript function is called directly.  
This form reads the information stored in reData frame and  
5 dynamically fills the content frame with this screen.

Referring to Figures 4 and 5, as will be more fully  
described hereafter, a screen display includes header frame  
470, navigation frame 472, footer frame 474, temporary data  
frame 476, request data frame 478, and content frame 480.  
10 The tempData frame 476 is used as a temporary holder for  
information, and to direct calls dynamically, while keeping  
the current data in the screen, and making the return data  
available to the application.

Table 1 shows, for the exemplary embodiment of Figure  
15 3, the software loaded on each of the servers used for the  
Req/Cat Web application.

**TABLE 1     SERVERS AND SOFTWARE**

1	<u>Server Description</u>	<u>Software</u>
2	Domino.Go Servers S1-S3	AIX 4.3.2
3		Domino Go 4.6.2.6 with Denial
4		of Service Fix
5		Net.Data 2.0.8
6		DB2 CAE 5.2



the relational database 129.

ZIP code validation is provided to assure that the tax department is provided the information needed implement the correct tax rules on purchase orders in SAP 382.

5           Chart of accounts validation includes the mapping of commodity codes to account codes. This is done to insure that all general ledger accounts associated with commodities are correct, and within this to insure that a description from SAP 382 is available for use by a customer to select  
10       correct general ledger (GL) account when doing financial validation on a requisition.

Referring to Figure 6, for ZIP code validation, when a purchaser access RCW, a user profile 130 is accessed. Profile 130 includes many defaults, one of which is delivery  
15       information (defaulted to all line items of requisition). One of the fields in profile 130 is ZIP code. When the purchaser enters his ZIP code, RCW searches ZIP code database 134, a database for ZIP codes which is fed periodically, say nightly, from the enterprise tax system  
20       136. This same validation routine continues by creating a requisition 132 with item options, including deliver to information with a zip code field. The requester can change

the deliver to information, 132, but any time it is changed,  
the ZIP code is checked against ZIP code database 134.

Whereas previously, customer input of ZIP code was accepted  
without checking. By this invention, ZIP code validation is

5 performed at the front end by a java or SQL program call to  
db2 database 134. Responsive to entry of ZIP code on a  
requisition or to the changing of delivery information which  
includes ZIP code on a requisition line item, the ZIP code  
is validated against a database of valid ZIP codes. In an  
10 alternative embodiment, the ZIP code database is refreshed  
from a trusted source, and the entered or changed ZIP code  
is checked for valid match with respect to state and city.

A create requisition request goes to catalog search,  
which used to search by part number or description.

15 Previously, this was a very limited search to just the  
catalogs. A search argument of %pen% was not a very crisp  
search for the customer. In order to improve the catalog  
search, in accordance with the present invention, searches  
may be conducted against a longer description and files up  
20 to 255 characters. Screen down searches are provided for  
sub-commodity. Wild card searches used to require %, but  
now assumes a wild card search in all cases. Searches are  
also provided against subcommodity. As a result, catalog  
searches now reference short description, long description,



and catalog sub-commodity. A database catalog includes part number, short description, long description, oem part number, commodity code. Newly added is subcommodity.

Referring to Figures 7 and 9, the method of the preferred embodiment of the invention is described for managing a chart of accounts 140. When creating a commodity list, which includes expense, capital, and resale accounts 142, commodities descriptions 180 are pushed to the correct commodity group. The resulting chart of accounts 140 is available from SAP 382. Previously an administrator had input a chart of accounts. Now, a company administrator, for example, may select from commodity accounts 142 the expense field, which results in drop-down display of a valid chart of accounts 144 from SAP chart of accounts 140 with account numbers 148 and commodity descriptions 146. The company administrator may then select from that valid chart of accounts 144 the correct commodity to push to company/commodity document 150.

Referring to Figure 8, the process for a requester to create requisition is set forth. By way of example, a requestor creates a requisition by doing in step 154 a search for "supplies", which will bring to him in step 156 a display presenting commodity W14, and thence in step 158 to

END9 2000 0110 US1

a catalog (for example, a Staples catalog) which includes commodities (pens, erasers, calendars), from which the requester can create several line items. Upon selecting "proceed to accounting", the requester is presented a

5 financial summary 160 including commodity code w14 pens for line item 1, w14 erasers for line item 2, and w14 for line item 3 calendars. The user may then request display of financial worksheet 162. In this window 162, the requester will see a title 164 expense, which can be changed, for

10 example, by toggling to other categories, such as balance sheet. Selecting G/L account 166 may drop down a list showing several account codes 168 and related descriptions 170, depending upon what the company administrator has pushed to the commodity document 150 from which financial

15 worksheet 162 is derived. Previously, a requester was provided in worksheet 162 one account code choice without description. By this invention, the requester is provided correct general ledger account codes and descriptions, resulting in less miscodes, more correct ledger entries, and

20 correct SAP account codes. This improved general ledger account selection process avoids back end processing to correct erroneous entries.

Thus, in accordance with a preferred embodiment of the invention, a method is provided for creating a valid chart

of accounts from which an administrator 184 can facilitate and enable a requisitioner to select a valid general ledger account. First, there is push from an enterprise (erp) system a chart of accounts 140 with descriptions to a req/cat system database. The administrator selects from req/cat system database valid accounts with descriptions for a given commodity and purchase time period, and then pushes the selected account/description tuple to the company commodity groups, thus completing the setup of the commodity documents 150 to be used in the requisition creation process. A company commodity document 150 created by administrator 184 may include for each commodity code under each company, commodity code 152, which is a very broad category, short description 190, long description 191 (from procurement organization 182), key words 192, approvers 193, financial information 194 (including purchase type 198, and general ledger account 199), route-to buyer 195 (by plant association), preferred supplier 196 (which associates the commodity code to a catalog 158), and special handling code 197 (with drop list including, for example, skills matching, obi, administrative services) -- all used to drive the customer to the correct commodity.

To create a requisition, a user searches against

commodities and catalogs in commodity description documents

150, which may be Notes documents or DB2 records, and  
creates one or more line items. These searches may be done  
by catalog and non-catalog, and driven based on descriptions  
entered by requester. A hierarchy of families may be  
5 provided as an alternative search approach. The  
requisitioner initiates a proceed to accounting process,  
which displays line items which may be selected by  
requisitioner; and then displays a financial worksheet  
created by a Java agent with fields which need to be  
10 selected or populated by the requisitioner from the company  
commodity document, based on purchase type, and which  
presents valid general ledger accounts numbers and  
descriptions to the requisitioner.

### 3. Back End

15 Referring to Figure 12, in a large enterprise, the  
requisition catalog requires a very large database. In  
accordance with the preferred embodiment of the invention,  
such a large data repository is provided by the using the  
IBM DB2 relational database 210. Other possible databases  
20 include Oracle, Sybase, and MSSQL.

Lotus Notes databases are built upon an object model

and classes: databases, views, and documents are classes used to access Notes data. But, these classes are set to be final and not extendible, and a Req/Cat Web database must be extendible.

5           Consequently, referring to Figure 12, in accordance with an embodiment of the present invention, DB2 access routines 208 are provided for accessing DB2 data 210. The Req/Cat Web application executes Lotus code, with access controlled on the code, and data obtained from and written  
10           to relational database 210.

          Normally, Notes saves all data as documents. There is a save method provided for that purpose. In accordance with a preferred embodiment of the invention, the Notes save method is intercepted and stopped, and execution passed to  
15           Req/Cat Web code for saving data to DB2. In the same way, execution of a Notes open method is intercepted and stopped, and then Req/Cat Web code executed to pull information in from DB2.

          Lotus Notes provides for web applications, and supports  
20           methods called webqueryopenagent, and webquerysaveagent. Notes also provides a saveoptions parameter. Setting saveoptions to zero tells Notes not to save a document.

In accordance with the preferred embodiment of the invention, saveoptions is set to zero, and webquerysaveagent used to save data in DB2. The webquerysaveagent is written in Lotus Script, and calls Lotus Script extensions and also  
5 can also call its own APIs 200, 202, including the database api's 208. At this point, Req/Cat Web has full control, and can save one or many tables, can explode the data model and write many tables.

On the other side, instead of editing an existing  
10 document as is done with Notes, Req/Cat Web executes createnewdocument. As the document opens, Lotus Notes gives the query webqueryopenagent, and this is also written in Lotus Script, which has access to data base api's 202, where data from many database 210 tables may be read to construct  
15 a Lotus document from DB2.

This configuration involves some naming standards and a hierarchy of interfaces. By way of example, database access routines are, by convention, data application programming interfaces (DAPI) 208. These are routines for accessing  
20 data 210 outside of the Req/Cat Web application. Referring to Figure 10, a hierarchy of application program interfaces (APIs) includes core API's 200 containing everything necessary to connect to database 210. Next in hierarchy, to

access specific data, are database API's (DAPI) 208, which interface to a single piece of data (such as company or employee information.) Below these rest the business logic code 204.

5           In a programming environment, the top of pyramid represents the work of a core DB2 programmer. Below him are those people who use core DB2 API's and write, for example, DAPI's 208 to access individual DB2 tables within database 210, for example API's for countries. These core APIs 200, therefore, include a GET method, and update, insert, and delete routines. Third level 204 represents the application programmer who only needs to use these methods (ie, company dapi: IBM US) in their business logic 204 applications, including ability to update, for example.

10  
15           Referring to Figure 11, this same pyramid is used to implement graphical APIs 206 on the user interface 212, business APIs 207 on the business logic 204 interface, and database APIs 208 on the database 210 interface. This illustrates that duties of programmers can be separated, so that everyone need not know the complexities of the entire system. That is, some developers work on data manipulation, others on the user interface, and still others on business logic. The application developer need not know the names of

the actual database, tables, or fields, or even how to  
access them. This also enables a DB2 administrator to alter  
a table, and only affect the one DAPI developer that wrote  
the specific table DAPI 202. All code is one routine, so  
5 changes to the database need only affect one piece of logic.

Referring to Figure 13, an example of this API  
implementation is illustrated. CoreDB2 220 is the core API  
200 to connect to DB2 210. It contains two classes,  
configuration class DB2Config 222 and base class DB2Base  
10 224.

Calling DB2Config 222 determines database name 230,  
user identifier 231, and password 232 - information that the  
database requires to establish a valid connection, and is  
passed to DAPI 208 for making that connection. (Without  
15 this method, user IDs and passwords would have to be hard  
coded in the application.)

DB2Base 224 is extended by the DAPI 208 programmer for  
each DAPI 202 instance that is needed. It contains methods  
240, 241 for connecting to and disconnecting from the  
20 database, a method 242 for defining the number of rows to  
return at a time, a method 243 for getting the next group of  
records, methods for reads 244, inserts 245, updates 246,



and deletes 247, commit 248 and rollback 249 options, and a  
flag 250 to determine if all data has been retrieved.

DAPIUserProfile 226 is a class for retrieving or  
updating information about an employee. It extends DB2Base  
224 so the application 204 developer would not have to write  
the logic to access DB2 210, but could concentrate on the  
information about the employee. The DAPI 202 developer  
would need to know about the employee table (table and field  
names, for example) and would implement methods for  
selecting and displaying data. In an exemplary embodiment,  
DAPIUserProfile class methods include the following:

```
260  selectEmployeeByEmpID(employeeID,companyCode,  
      countryCode)
```

```
261  selectEmployeeByWebID(employeeWebID)
```

```
262  selectEmployeeBothWays(employeeID,companyCode,  
      countryCode,employeeWebID)
```

```
263  selectEmployeeByName(lastName,firstName)
```

```
264  insertEmployee(columnNames,DB2ColumnValues)
```

```
265  updateEmployeeByEmpID(employeeID,  
      employeeCompanyCode,employeeCountryCode,  
      UpdateNameValues...)
```

```
266  updateEmployeeByWebID(employeeWebID,  
      UpdateNameValues,UpdateByUserID)
```

```

267 deleteEmployeeByEmpID(employeeID,companyCode,
countryCode,UpdateByUserID)
268 deleteEmployeeByWebID(employeeWebID,
UpdateByUserID)
5 269 deleteEmployeesWhere(Condition, UpdateByUserID)
270 clearTable()

```

Once the data is selected, a few of the properties that are available for a given employee include empWebID, empLastName, empFirstName, empIntPhoneNum, empExtPhoneNum, empEmailID, empID, empCompanyCode, empCountryCode, and empCountryName.

An application 204 like the human resources (HR) application would then need to read HR data and insert it into the employee table if the employee did not exist, or update it if something changed, or delete it if the employee no longer exists. This application developer would then only have to know the methods and properties of the userProfile class 226 in order to write the application. An example of such an application is set forth in Table 2, with reference to the steps of Figure 14. This table sets forth the HR load routine, a batch program to read HR data from a flat file and insert it into the DB2 user profile table.

---

TABLE 2      EXAMPLE APPLICATION

---

1            'in the following step, instantiate a DB2 config  
2            object, and call it db2; the database name 230, etc.,  
3            is determined by instantiating the db2 config object,  
4            as defined by the core programmers'

5       272: Dim db2 As New DB2Config(session)

6            'the database information is known, and can be passed  
7            to the employee profile.'

8       274: Print "The target DB2 database alias is "&  
9            db2.getDB2DatabaseName()

10           'All that must be done is to pass the DB2 class to the  
11           userProfile.'

12       276: Dim eps As New userProfile(db2)

13           'Delete everything from the employee table to start the  
14           bridge.'

15       278: I headerDivision = "" Then  
16           Call eps.clearTable()  
17       Else  
18           Call eps.deleteEmployeesWhere("COGRP\_CD= ""  
19           &headerDivision &""")  
20       End If

21       280: For count = 2 To records-1

22           'Read the next record and make sure that it can be  
23           loaded without problems'

24           If ReadInputFile(inputFileNum, count, userid, al, cl  
25           eps, cci) Then

26           Call eps.insertEmployee(DB2ColumnNames,  
27           BuildDB2ColumnValues())  
28           db2kAdditions = db2Additions+1

29           End If

30       Next...

---

In Table 3, a pseudo code example of use of the webquerysaveagent process is illustrated.

---

**TABLE 3    WEQUERYSAVEAGENT EXAMPLE**

---

```
1      Dimension db2 As New DB2Config(session)
2      Print "The target DB2 database alias is "&
3      db2.getDB2DatabaseName()
4      Dimension eps As New userProfile(db2)
5      execute process 260 to selectemployee by employee id
6      if employee does not exist, then
7          execute process 264 to insert employee
8          else if employee changed, then
9              execute process 265 to update employee
10         else (employee not changed) information to user
11         "employee not changed"
12         no save
13     endif
```

---

In the example of Table 3, an application programmer 204 is using a dapi written by programmers 202.

In this manner, the relational database 210 is used as

the data source, instead of a Notes database, in a way that  
hides the complexities of DB2 database programming. That  
is, in a fashion to similar Notes programming - the idea is  
to allow a Notes programmer to use a familiar looking class  
5 226 to load and save data.

#### 4. Catalog Administration

In accordance with the preferred embodiment of the  
invention, a requisition catalog administration function  
provides control, audit, and publishing procedures for flat  
10 files received from suppliers.

Referring to Figure 15, a system architecture for  
implementing catalog administration includes a requester  
browser 410, a buyer browser 412, with net.data connections  
391 and 393 to a dedicated DB2 server and DB2 database 390  
15 having a staging table 392 and a production table 394  
through network dispatcher 102 and Go cluster 104. Go  
cluster 104 is also connected through network dispatcher 106  
and Domino cluster 112 to Domino application server 114.  
A buyer 412 accesses staging table 392 via net.data  
20 connection 391, and a requestor 410 accesses the production

394 table via net.data connection 393. This connection 391,  
393 is implemented as a single path, and the requester and  
buyer provided different levels of authority to access  
different tables 392, 394 in DB2 390 over that same path.

5 Buyer 412 can change selected fields in the staging table  
392 and can update production table 394 from staging table  
392. Requester 410 can only view (not change) the  
production table 394. The buyer at browser 412 is  
controlled by a GUI which contains access control list (ACL)  
10 control on fields, and edit authority for catalog access.

Referring to Figure 16, this architecture further  
includes a catalog flat file 314, an application program 384  
within application server 114, catalog administration  
function 386, Req/Cat Web function 388, and WEB  
15 communications 396 and 398 connecting a catalog  
administration function with ACL control 400 and requester  
402 to database 390.

In operation, catalog flat file 314 is received by  
application server 114 through firewall 380 via EDI and  
20 loaded into DB2 database 390 by application program 384.  
Catalog administration function 386 specific users 400 audit  
control over certain fields in staging table 392, and  
publishes the catalog data to the live, or production,

system 394. Function 386 presents to buyer 400 a staging table 392 with a GUI front end, with selected fields enable and other fields not enabled to be personalized.

Catalog file 314 is a flat file containing catalog  
5 items in a column delimited format specified to supplier 300 by the enterprise.

Application server 114 manages database 390 containing staging table 392 and production table 394. A catalog file 314 comes to application server 114, which includes a  
10 program 384 for moving data from that flat file to staging table 392. See Table 7.

A buyer at terminal 400 accesses the staging table 392 on the web 396. He views catalog items and enters transactions with action button which transfers information from staging table 392 to production table 394. Production  
15 table 394 is referenced by req cat web 388, and staging table 392 is referenced by the catalog administration function 386 operated by the buyer 400. Typically, a buyer is member of procurement organization with responsibility  
20 for negotiating deals with suppliers. A requester 402 accesses production table 394 over web 398 to create and submit a requisition to SAP 382.

In accordance with the preferred embodiment of the invention, control over what buyer 400 can change is provided by a GUI in a process which loads a catalog 392 from a supplier into a production system 394.

5 Catalog files 314 come in from suppliers in an enterprise defined standard format, and the access to fields in that format is hard coded into the catalog administration function 386. Application server program 384 has error checking functions to assure validity of a catalog 314 from  
10 a supplier 300. Buyer 400 accesses staging table 392 through a catalog administration function 386 which has hard coded into it the access controls on the various fields in the catalog format. Production table 394, which is accessed by the requester 402, is updated periodically (upon buyer  
15 actuation) from the staging table 392.

Implementation of the invention involves several code procedures: there is a program 384 which loads a file 314 that is received via EDI into a table 392 in DB2. There are routines 388 which allow a buyer 400 to browse certain  
20 catalogs in the staging table 392 and change certain fields while being inhibited from changing others. And there are the routines 386 which take the approved catalog and migrate the data from the staging DB2 table 392 to the production



DB2 table 394. Table 7 is an example of one such routine.

Referring to Figure 17, a preferred embodiment of these processes are presented. In supplier system 300, supplier source data 310 is extracted and reformatted in step 312 to  
5 create catalog flat file 314 in the format specified by the enterprise. In step 316 that flat file is transmitted to the enterprise 302, as is represented by line 305, where it is accepted in step 320 into the enterprise EDI mailbox 322. In step 324, the data in the flat file in mailbox 322 is  
10 reformatted and put into generation data group (GDG) 328, a location for saving more than one file, so as to retain the last N iterations, and a archive entry made to processing log 326. In step 330, a delivery component executes to send data from GDG 328 to application server 114, as is  
15 represented by line 303, in the form of catalog flat file 340. In step 342, a delivery component receives the flat file and, as is represented by line 347, starts job scripts including MASSLOAD for reading the flat file and loading staging table 392, and as represented by line 345 alerts the  
20 buyer 352. As is represented by lines 311, 313 and 315, respectively, MASSLOAD 344 accesses database server 306 procedures catalog\_s 360, product\_s 362, and Req/Cat Web 364, and makes an archival entry to processing log 346.

Catalog\_S 360 is the staging table 392 for the catalog profile, which provides for each catalog the supplier name, the start and end dates of catalog validity, the currency, and so forth.

5           Product\_S 362 is the staging table 392 that holds the catalog parts, a listing by part number of price, description, and so forth.

10           Req/Cat Web validate procedure 364 is a Java stored procedure for performing the initial validation of data received in flat file 340.

            Front end 370 is a GUI used by the buyer, for example to update the catalog 366.

15           In operation, validation procedure 364 validates the format and identifies catalog changes to product\_s 362, logging those changes in file 332. It then checks a flag in catalog 366, and if the flag is on invokes procedure 350 provided catalog\_s 360 does not indicate any critical errors. Validate and load procedure 350 then moves the contents of product\_s staging table 362 into the appropriate  
20           production table 368, writing any errors to processing log 348. (In the event that procedure 364 does not call

procedure 350, then buyer 352 intervention is required via  
GUI 370.) After procedure 364 completes execution, it may  
either stop, or if catalog 366 has a flag set on and  
catalog\_s staging table 360 indicates no critical errors,  
5 then procedure 364 will invoke validation and migration  
procedure 350. After validate procedure 364 completes, it  
has written to prod\_message\_s file 332, and the buyer may  
use GUI 370 to read messages from file 332 and make any  
desired changes to staging table 362. They buyer may also  
10 choose to reject the catalog and, via step 354, contact the  
supplier to restart the process. This occurs if there is an  
error in the unit prices, which is an example of information  
in the catalog which a buyer is not authorized to change on  
his own.

15 After the buyer has used GUI 370 to make the values in  
staging table 362 acceptable, he sets the flag in staging  
table 360 which allows migration procedure 350 to run to  
move data from staging table 362 into production table 368,  
a relational database, such as Net Commerce (NC) or IBM DB2.

## 20 5. Role Table GUI

A preferred embodiment of the invention provides through use of a role table in DB2 database 129 (Figure 3, or 390 in Figure 16) very flexible access to DB2 tables without requiring involvement by a database administrator (DBA) to issue grants against the tables, thus bypassing the problem caused by Notes agents all coming from the same user (the Notes server ID).

Everything in Lotus Notes, even code, is in documents which require access control list (ACL) controls on access. Consequently, the preferred embodiment of the invention uses Notes ACLs to access code. However, when accessing data, a role table 420 (see Figure 19) is used to build roles and permissions, and an object model is provided to generically access data from database 210, thus extending Notes to access a non-Notes data source 210. In order to configure DB2 to work in a Notes application environment, a single sign off is provided after getting through Notes code ACLs. This does not involve use of any of DB2's role tables and grants, but rather a single web ID 434 known to the Notes code to access the DB2 data.

Referring to Figure 19, role table 420 includes for each of a plurality of user WEB ID's 422, the associated role 424 and level 426 of granularity at which the user is

END9 2000 0110 US1 47

associated with the role. Example: for a role 424 of country administrator, the level 426 is the country id, and user with web ID 422 of 02 can update contract profiles for that country.

5           Any person at a browser 100 attempting to access a row in a DB2 table 390 must pass the role table 420 check. Further, for accessing a supplier table in DB2 390, anyone can view the list of suppliers in the application that applies to the requesters country, but only the country administrator can update them.

10

User 422 identifies a user profile 430, which specifies the user name 432, web identifier 434, charge information 436, including country, company, work location) and delivery information 438 (including street, office, and building).

15           Thus, in accordance with the preferred embodiment of the invention, the web ID 434 for the browser user is used to control access to the Notes databases and to the DB2 databases. The Notes databases have code and documents which the user must access (including contract profiles, cost center profiles) and also tables in the DB2 database.

20           A user must access both Notes databases and DB2 databases, and access to all of these databases is controlled based on

the user web ID 434 through the use of role table 420.

In order to make and use the preferred embodiment of the invention, an implementer and user would do the following:

- 5      1.    Determine what levels of granularity are relevant to the application. (For example, the company that the user belongs to, the country, etc.)
2.    Populate the DB2 table 420 with Web IDs 434 and associated roles 424 and levels 426.
- 10    3.    Write procedures to locate a user 422 in table 420 and pull out associated roles 424 and levels 426.
4.    Provide code routines or functions using these procedures which are authorized for execution by users with specific roles and levels.
- 15    Code using these routines would then compare the roles and levels to the specific role and level that is required based on the function. For example, a user could be defined as a country administrator for France and a company administrator for a small company in the US. A routine that updates

accounting information for the small company would not care about the country-level authority, so would look in role table 420 for company administrator role 424 for this user web ID 422. The level 426 of the role 424 would further  
5 restrict this user 422 from updating the accounting information for any company in the US other than the one corresponding to the level 426 to which he is assigned.

The invention allows a person's access to DB2 tables to be limited by the contents of a second db2 table rather than  
10 the grants issued by the DBA. In the Notes environment of the preferred embodiment of the invention, the ID which is actually granted the authority to the table is the Notes Server machine since the server accessing the db2 tables is the Notes server. Since the user web id is once removed,  
15 this provides a mechanism for applying a level of authority to the user to then apply to the db2 table. That mechanism is the role table.

Table 4 lists and describes the Req/Cat Web tables of the preferred embodiment of the invention.

---

**TABLE 4    REC/CAT WEB ADMINISTRATION TABLES**

---

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
Access Authority	REQCAT.TROLE_AUTHORITY	Maps a user to a role and the qualifier for that role (i.e., what level)
	REQCAT.TROLE_CODE	Defines the list of valid roles - Global Admin, Country Admin, etc
Account numbers	REQCAT.TACCOUNT_PROFILE REQCAT.TLACCOUNT_PROFILE	Holds account codes to be validated against
	REQCAT.TACCT_PROF_DETAIL REQCAT.TLACCT_PROF_DETAIL	Provides details about the account codes
	REQCAT.TACCT_VALIDATION1	Holds account codes to be validated against, as well as what type of validation is occurring (i.e., against BMS, Remind, Project numbers, Customer numbers, etc)
	REQCAT.TACCT_VALID_TYPE	Defines the list of validation types
	REQCAT.TCOMP_COA REQCAT.TLCOMP_COA	Defines the GL account numbers that are available for each company code, and provides a translated description
Approver routing	REQCAT.TAPPROVER_ASSIGN	Links an approver to a type and a code (i.e. I/T 0001)
	REQCAT.TAPPROVER_PROFILE	Defines the approver's name, Web ID, etc.
	REQCAT.TAPPRV_TYPE_PROF	Defines the types of approvers available to the application (capital, financial, I/T, chemical, safety, tax)



ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	REQCAT.TCATLG_APPROVAL	Allows a catalog administrator to flag a catalog item as requiring chemical or safety approval in specific locations. For example, toner is not considered a chemical item except in Vermont, because of special environmental laws in that state.
Buyer routing	REQCAT.TBUYER_PROFILE	Defines the owner of a buyer code and contact information
	REQCAT.TBUYER_ROUTING	Links a buyer to a commodity
	REQCAT.TBUYER_SUPPLIER	Links a buyer to a supplier
Catalog profiles	RC.CATALOG	Defines the characteristics of a catalog - supplier, expiration date, currency, etc.
	RC.CATPLREL	Defines the plants which are allowed to access this catalog
Commodity families	NC.CATEGORY	Defines the global list of commodity groupings
Commodity codes	RC.COMMOCODE	Defines the global list of commodities and identifies which family each belongs to
Company commodities	RC.COMMCOMP	Not all commodities may be valid for all companies. This table identifies which commodity codes the company wants to use.
	REQCAT.TCOMMCOMP_BUYER	Some commodities require that the user select a buyer from a predefined list. This is the predefined list.
	REQCAT.TCOMM_COMP_COA	This associates GL account codes with the commodity code.

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	REQCAT.TCOMM_WLOC_RCV	This defines for which work locations this commodity is 'receivable'. This flag is forwarded to SAP for further use in receiving locations
	RC.SUBCOMMODITY	Some commodities are too broad and the need exists for sub-dividing the goods under this commodity so that different suppliers and different purchase processes can be used.
	RC.SUPPSUBCOMM	This links a supplier to a specific subcommodity.
Companies	RC.COMPANY	Associates SAP company codes with associated country. For example, IBM US contains three company codes for IBM, Lotus, and Tivoli.
Countries	RC.COUNTRY	Holds the list of ISO country codes, i.e., US, FR, DE, etc
Company groups	REQCAT.TCOMPGRP_TYP_PROF	Defines the list of valid grouping types, such as ACCOUNT, UPROF
	REQCAT.TCOMPGRP_PROFILE	Defines the list of group names and links them to their types, such as IBMUS - ACCOUNT and IBMUS - UPROF
	REQCAT.TCOMPANY_GROUPING	Lists the company codes that belong to the specified grouping
Plants	RC.PLANT	Associates plant codes with company and country. A company can have many plants, a plant may belong to only one company.
Suppliers	RC.SUPPLIER	Defines the characteristics of a supplier - name, code, contact information, location

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	RC.SUPPCOMP	Defines which company codes may reference this supplier for purchasing
Work locations	REQCAT.TWORK_LOCATION REQCAT.TLWORK_LOCATION	Associates work locations with plant, company, and country. A plant can have one or more work locations, a work location may belong to only one plant.
	REQCAT.TWORKLOC_DELTOADDR	For those work locations which have a predefined CDC (Chemical Delivery Center) address
User profiles	REQCAT.EMPLOYEE_PROFILE	Holds employee information
Catalog parts	see Figure 18, DB2 NCF tables 368	Hold part information, category / subcategory information, etc.

## 6. Relational DB Agents

In accordance with a preferred embodiment of the invention, in a Notes/DB2 hybrid environment, a Notes agent reads data from a DB2 table, and then dynamically populates that data to an HTML page. In this manner, an the existing infrastructure (including Notes, Domino Go, and DB2) is used to combine HTML and Java script web presentation with DB2 data.

Referring to Figure 20, Notes agents 440 are used as intermediaries. Each such agent 440 reads DB2 tables 390, collects data using SQL select statements, and builds web page 442 dynamically, writing out the Java script and HTML to present the page on a Web browser, such as Web browser 100. The results of the DB2 searches also helps to determine which HTML needs to be written, something which standard HTML cannot handle. Thus, conditional logic may be used.

A plurality of agents 440 are provided. The premise is the same in all: figure out who is asking, and then tailor what is shown by what they are authorized to see. The example of Table YY is the supplier profile agent.

This process makes use of the Notes connection function `lsx:lc`. This Lotus Script connection is a built in API for connectivity to relational databases. The `lsx:lc` connector is a Lotus provided API which allows connection to DB2.

For example, to display a list of supplier profiles, two DB2 tables 390 must be read: one provides a list of suppliers and the other is role table 420 (Figure 19). When role table 420 is read, the code tests the users ability to edit (country admin for country of supplier), and may

display the web page differently depending thereon. A dynamic feature of the invention is that straight text may be displayed, or with text with hyperlinks to open a supplier profile, as an example.

5           To make and use this preferred embodiment of the invention, the following is done:

1.    Use the Lotus Script lsx:lc connector connect to DB2.
2.    Depending on the DB2 table being read and the functions required, write functions to Create, Read, Update, and  
10   Delete with respect to the DB2 table.
3.    Write the HTML to display the page, and then have the Notes agent 440 Print these HTML commands to the browser so that they appear in a meaningful presentation to the end user.
- 15   4.   Use conditional logic to change the look of the page 442 based on the results of the DB2 390 lookups.

Inputs to the method of this embodiment of the invention include the DB2 table to be read or updated, and the output includes HTML conditionally generated based on

results of the DB2 table reads.

The HTML page being populated may, for example, provide a list of suppliers. Such pages may also be used in the requisition or configuration area of the application, displaying commodity codes, suppliers, and so forth.

---

**TABLE 5      EXAMPLE AGENT 440**

---

1      This agent is invoked from the administration tab for 'supplier'. It is  
2      presenting the user with a view of suppliers that have been configured  
3      on the system. Based on the access authority of the user, this list  
4      will be presented either as just text, for the general user, or as  
5      hotlinks for an administrator to then open an individual supplier  
6      profile and update it.

7      Sub Initialize  
8      //setting up variables  
9          Dim src As New LCConnection ("db2")  
10          Dim fldLst As New LCFieldList(100)  
11          Dim suppname As LCField  
12          Dim suppcode As LCField  
13          Dim InfoView As AllInfoView  
14          Dim session As New NotesSession  
15          Dim doc As NotesDocument  
16          Dim sqlQueryString As String  
17          Dim flag As Variant  
18          Dim admin As Integer  
19          Admin=True  
20          Dim lclsxSession As LCSession  
21          Dim supplierdb As notesdatabase  
22          Dim configview As notesview  
23          Dim configdoc As notesdocument  
24          Dim lookuptype As String  
25  
26          On Error Goto errHandler  
27  
28          Set supplierdb=session.currentdatabase  
29          Set configview = supplierdb.getview("APPVIEW")  
30          Set configdoc = configview.getfirstdocument  
31          lookuptype = configdoc.HRFormat(0)  
32  
33          Set doc=session.DocumentContext  
34          Set InfoView=New AllInfoView  
35  
36      //connect to DB2

```

37         InfoView.ConnectToDB2
38     //Query the role table for users roles and authority levels
39     If Not InfoView.CheckAdminPrivilegesOK (doc.CurrentUserName(0))Then
40         Admin = False
41     End If
42     InfoView.DisconnectDB2
43
44     If (Admin = False) And (lookuptype = "DON")Then
45         Print"<script>alert('You are not authorized to view Supplier
46 documents Please contact your procurement administrator if you have
47 questions');"
48         Print "history.go(-3)</script>"
49         Exit Sub
50     End If
51
52     //Begin printing out HTML from the agent
53
54     Print "<link rel=stylesheet type='text/css' href='"/transform
55 /reqcat/css/default_styles.css"'>"
56     Dim db2c As New db2config(session)
57
58     //Connect to DB2
59     src.database = db2c.getDB2DatabaseName() "reqcat41"
60     src.Connect
61
62     //build the SQL Query
63     sqlQuerystring = "select Surname, SUID from RC.SUPPLIER"
64     sqlQueryString = sqlQueryString & " order by Surname"
65
66     If (src.execute(sqlQueryString, fldLst) = 0) Then
67         Print "You do not have any supplier profiles to view."
68     End If
69
70     Set suppname = fldLst.Lookup ("Surname")
71     Set suppcode = fldLst.Lookup ("SUID")
72
73     //Print more HTML
74
75     Print "<TABLE width='100%' cellpadding='0' cellspacing='0'>"
76     Print "<BR><TR><TD class='\""banner\"" bgcolor='\"3366cc\"" align=
77 \"center\"> Suppliers</TD></TR>"
78     Print "</TABLE>"
79
80     //If the user is an admin, then provide a button for adding new
81     suppliers
82
83     If Admin Then
84         Print "<form>"
85         Print "<input type='button' name='mybutton' value='Add
Supplier Profile' onClick='\"javascript: document.location.href="

```

```

86      './SUPPLIER?OpenForm';"" >"
87          Print "</form>"
88      Else
89          Print "<BR>"
90      End If
91
92      Print "<table cellpadding=2 cellspacing=0 border=0>"
93      Print "<tr><td class=""bannersublevel"" ><B> Supplier</B></td>"
94      Print "</tr>"
95
96      //Toggling background color on alternate rows
97
98      flag = True
99
100     While (src.Fetch (fldLst) > 0)
101         If (flag) Then
102             Print "<tr bgcolor=#CCCCCC>"
103             flag = False
104         Else
105             Print "<tr bgcolor=#FFFFFF>"
106             flag = True
107         End If
108     //If user is an admin, then print the supplier name as a hotlink
109
110     If Admin Then
111         Print"<td class=""field""> <a href=./SUPPLIER?OpenForm&"
112         & suppcode.text(0) & ">"&suppname.text(0)&"</a> </td>"
113     Else
114         //otherwise just print it as text
115
116         Print"<td class=""field"">" &suppname.text(0)&"</td>"
117     End If
118     Print"<td class=""field"">" &suppcode.text(0)&"</td>"
119     Print "</tr>"
120 Wend
121 Print "</table>"
122 End
123
124 errorHandler:
125
126     Print "<br>" & session.currentagent.name & " - Line # " &Str(Erl)
127     & " // Error " & Str(Err) & ": " & Error$
128     If (lclsxSession.Status <> LCSUCCESS) Then
129         Dim text As String
130         Dim extcode As Long
131         Dim exttext As String
132
133         Call lclsxSession.GetStatus (text, extcode, exttext)
134         If (lclsxSession.Status = LCFAIL_EXTERNAL)Then
135             Print "<br>DB2 message: " &exttext & " code #" &
136             Cstr(extcode)
137         Else
138             Print "<br>Connector message: " & text
139         End If
140     Else

```



139               Print Error\$  
140           End If  
141  
142  
143   End Sub

---

## 7. Data Transfer

In accordance with the preferred embodiment of the invention, a system and method is provided for transferring to a Req/Cat Web (RCW) application in a timely manner large quantities of data from web sites that exist outside of a  
5       firewall, or internal applications within the firewall but outside of the Req/Cat Web application.

For the purpose of the description of this embodiment, RCW exists in a frame set in a browser. A frame set divides  
10       a screen into logical and user-friendly sections called frames. As part of security for browser 100, Netscape and Internet Explorer (IE) establish ownership of the frames: each frame is a window under control of browser 100. Browser 100 can open up a session in any frame desired.  
15       However, if all of the frames open on a browser are not owned by same session, then these frames cannot see the contents of each other.

Consequently, the problem is presented: if RCW needs to

access an outside supplier site 300 for information to get  
back through one its own the frames, as soon as data is  
written by that other site into one of the frame at browser  
100, RCW no longer owns the frame and cannot access the  
5 information. So this aspect of the invention is concerned  
with data passing.

In accordance with the preferred embodiment of the  
invention, the supplier 300 opens a new window through  
normal Java script commands and writes its data into it,  
10 along with the name of the agent to run in RCW application  
server 114. That new window then calls one of the RCW  
processes, which is able to see the data because it is not  
in a frame and is therefore available for RCW to access.  
That process causes an agent to runs (in RCW) that can see  
15 that data and write it to a frame on the RCW side, resulting  
in RCW owning both the data and the frame. This allows RCW  
to reach NOTES information, and write that information to  
other frames. RCW owns the data and the frame. Ownership  
is established in the RCW application.

20 Consequently, by carefully tracking and controlling the  
sequence of opening windows, RCW can establish the origin  
from which data is coming, where the data is going, and  
which process owns it.

Those are the high points. Review: two sites are talking to each other using an intermediate window, doing a handoff of data and of ownership of both data and frame such that when it is time to supply information to the RCW application, RCW owns the data, frame and process.

Referring to Figure 21, a system and method are provided for data transfer from a externally owned site to an application owned frame set which operates as follows. The RCW application opens a supplier site URL in a temporary frame 456. Upon user selection of go to supplier 451, as is represented by step 458, frame 456 opens the supplier window 460 as a separate browser session. Two windows are now open: the original application 450 with its window underlying, and a supplier window 460 over it with the supplier URL. The reason for doing this is that the supplier requires that the browser be full frame, not in a small frame set. The primary RCW application in window 450 is quiesced to a wait state. As is represented by steps 462, the user can now select from window 460 items to buy, search, or whatever the supplier deems is appropriate for a user to order his data. The user then issues the command to submit the order. In step 444, the supplier site then gathers content from order data entered at window 460, in step 446 formats the page, and in step 448 issues a call to



the requisition. This is key, Req/Cat Web has used its own process 480 to write into its own window 450, and knows who owns the data. First agent 480 process opened window 464 and writes the data to temporary frame 456 and then kicks off another process, second agent 484, that can read that data, can read and write to all of the frames 452 in the application, can access information from Lotus notes, and write all the information into the requisition.

Window 460 is provided by a supplier site from outside the application, and possibly also outside a firewall. Window 460 is an external application that allows execution of code 462 for performing search, select, submit (call enterprise server, which may be inside firewall), and order data, including gather content 444, formatting the page 446, and calling RCW 448 with the first agent 480 as an action form.

Window 464 is a window opened by the supplier to include a Req/Cat Web agent, first agent 480. First agent 480 posts document contents to temporary data frame 456. As a variation, for skills matching, calls are made to the agents 480, 484 with a parameter after placing the data to retrieve in a Notes database. The second agent 484 retrieves the data, can look up and add supporting data from

yet another Notes database.

The key consideration here is, "who owns the frame". The server that owns the agent that last wrote a frame owns it, and can see its content, but cannot see any other frame's contents if they were written by another server's programs or agents.

Window 464 and first agent 480 act as an intermediary. Content 466 is owned by the supplier server 300, but the first agent 480 is owned by the Req/Cat Web server 114. That first agent 480 then kicks off the rest of the process, passing the data and ownership to the RCW server 114 and the second agent 484. The second agent 484 can now can access Notes data on the Notes server 112, and issue the commands that send the order to be stored in the requisition.

## 8. Customizable Side Bar

In accordance with the preferred embodiment of the invention, a customizable side bar is provided. Dynamic HTML is used by the navigator responsive to user input to change data presented at the screen without having to

communicate with a remote server.

Referring to Figure 4, navigation frame or menu bar appears, typically, on the left of a display window, to display a plurality of menu boxes, including headers 491-494 and items 495-500. As a cursor is moved over the headers, each individual header is highlighted or some symbol 481, 483, 485, 487, respectively, rotated by, say, 45 degrees, so as to point either down or to the right, to indicate to the user the header which will, upon being clicked, toggled to either a collapsed or expanded state from its current expanded or collapsed state, respectively. As illustrated, headers 481 and 483 are in a collapsed state, and headers 485 and 487 are in an expanded state. When expanded, header 485 is expanded to show items 495-498, and header 487 to show items 499-500. The user may move the cursor to one of items 495-500, and select the item to update the data displayed in content frame 480.

Heretofore, when the user selects (clicks on) a menu header 491, there is generally a pause as the request is made to the server to obtain a new page including an expanded menu bar 472 including a display of the included items. In accordance with a preferred embodiment of the invention, when server loads the window to a client, all of

the information required to load the menu bar 472 is provided, including information for the expanded menu items (but not the content frame associated with them). If a menu header 485 is clicked when in the collapsed state, the menu items 496-498 are shown or made visible and the following menu headers and items are moved relative to the expanded menu bar. If a menu item 496 is clicked, then communication with the server is required to load the content frame 480.

Upon initial load, all headers 491-494 are collapsed and all menu items are hidden. Menu headers 491-494 are displayed below each other with no gaps between them. Clicking on a last menu header merely shows all the menu items and moves nothing below it. Clicking on the first menu header would show all of its items and move every header and item a constant amount without changing its visibility state. (The display area 472 may be off of the window, but is available via the scroll bar 490.) In accordance with this embodiment of the invention, the result of selecting a header 491-494 is an instantaneous response from the client browser either expanding or collapsing the selected header and respectively displaying or removing from display the included items.

This is done using dynamic html (dhtml), which allows





```

13      this.ns = document.layers;
14      this.ie = document.all;

15      this.loaded = 0;
16      this.whichone = 0;
17      this.whichgroup = 0;
18      if ( this.ns ) {
19          this.show = 'show';
20          this.hide = 'hide';
21      } else {
22          this.show = 'visible';
23          this.hide = 'hidden';
24      }
25      this.menus = menuVar;
26      this.max = menuVar.length;
27      this.images = new Array(this.max);
28      this.menuMove = new Array(this.max);
29      for (i=0; i < this.max; i++) this.menuMove[i] = 20 * (menuVar[i] -
30 1);
31      this.tabShow = [false, false, false, false, false, false, false,
32 false];
33  }

34  function appNavInit() {
35      var k=0;
36      if (this.loaded == 0) {
37          for (i=0; i < this.menuMove.length; i++) {
38              this.images[i] = new Array(this.menus[i]);
39              for (j=0; j < this.menus[i]; j++) {
40                  this.images[i][j] = new Image();
41                  pos = ("0"+i).slice(i>9,2) + ("0"+j).slice(j>9);
42                  this.images[i][j].src = "../images/men" + pos
43  +".gif"
44                  if (this.ie) {
45
46 document.images[k].src=this.images[i][j].src;
47                     k++;
48                 } else
49
50 document.layers["D"+pos].document.images[0].src=this.images[i][j].src;
51                 }
52             }
53             this.loaded=1;
54         }
55     };

56  function appNavSizeit() {
57      if (this.loaded==1) {this.loaded = 0; this.init();}
58  };

59  function appNavToggleText(z) {
60      if (this.loaded==1) {
61          this.tabShow[z] = !this.tabShow[z]
62          for (j=1; j<this.menus[z]; j++) {
63              pos = ("0"+z).slice(z>9) + ("0"+j).slice(j>9);
64              if (this.ie)
65                  text = document.all("D"+pos).style

```

```

66         else
67             text = document.layers["D"+pos]
68             if (this.tabShow[z])
69                 text.visibility = this.show;
70             else
71                 text.visibility = this.hide;
72         }
73         for (i=z+1; i<this.max; i++) {
74             for (j=0; j<this.menus[i]; j++) {
75                 pos = ("0"+i).slice(i>9) + ("0"+j).slice(j>9);
76                 if (this.ie) {
77                     text = document.all("D"+pos).style
78                     if (this.tabShow[z])
79                         text.pixelTop += this.menuMove[z]
80                     else
81                         text.pixelTop -= this.menuMove[z]
82                 } else {
83                     text = document.layers["D"+pos]
84                     if (this.tabShow[z])
85                         text.top += this.menuMove[z]
86                     else
87                         text.top -= this.menuMove[z]
88                 }
89             }
90         }
91     }
92 };

```

---

## 10. Open Catalog File

Table 7 presents a pseudo code description of the procedure for loading a catalog file.

---

**TABLE 7    LOAD CATALOG FILE**

---

```
1  Open catalog file
2  Insert new Catalog Header into RC.catalog_s with a version
3  number of 0
4  while more catalog file records loop
5      if PRODUCT record
6          insert a product_s record
7      if RECORD_COUNT record
8          save expected record count
9      if START_DATE record
10         update_catalog_s with the date
11     if STOP_DATE record
12         update_catalog_s with the date
13     if VENDOR_SERIAL record
14         update_catalog_s with the serial
15     if CATALOG_ID record
16         if we have Supplier_ID then
17             Make sure the supplier, catalog pair are same as in
18             Database
19         update new Catalog Header with catalog ID
20         update existing version 0 catalog to be max(version)+1
21         (this pushes what used to be "current", ie version 0,
22          to the top of the history stack)
23     if SUPPLIER_ID record
24         if we have Catalog_ID then
25             Make sure the supplier, catalog pair are same as in
26             Database
27     end while
28     Error if actual record count doesn't match expected record
29     count
30     Call Validate stored procedure to validate catalog
```

---

### **Advantages over the Prior Art**

It is an advantage of the invention that there is provided a scalable database system in a web environment with optimal access performance characteristics for an

5    expanding number of clients and a growing database.

It is an advantage of the invention that there is provided a system and method for enabling a requester to select the correct general ledger account when doing financial validation on a requisition.

5           It is an advantage of the invention that there is provided a system and method for utilizing Lotus script extensions in combination with a relational database to provide high capacity storage without performance degradation.

10           It is an advantage of the invention that there is provided a system and method for enabling a buyer a means for editing catalog content before externalizing it to production for access by requesters.

15           It is an advantage of the invention that there is provided a system and method for providing very flexible access to DB2 tables without requiring database administrator (DBA) involvement to issue grants against the tables, and bypassing the problem caused by Notes agents all coming from the same user (the Notes server ID).

20           It is an advantage of the invention that there is provided a system and method utilizing an existing

infrastructure including Lotus Notes, Domino Go, and DB2 to combine HTML and Java script web presentation with DB2 data.

It is an advantage of the invention that there is provided a system and method for enabling transfer of data from a supplier site to a RCW application which does not entail frame spoofing.

It is an advantage of the invention that there is provided a system and method for dramatically increasing the speed of operation of a navigation frame of a GUI.

#### **Alternative Embodiments**

It will be appreciated that, although specific embodiments of the invention have been described herein for purposes of illustration, various modifications may be made without departing from the spirit and scope of the invention. In particular, it is within the scope of the invention to provide a computer program product or program element, or a program storage or memory device such as a solid or fluid transmission medium, magnetic or optical wire, tape or disc, or the like, for storing signals

readable by a machine, for controlling the operation of a computer according to the method of the invention and/or to structure its components in accordance with the system of the invention.

5

Further, each step of the method may be executed on any general computer, such as an IBM System 390, AS/400, PC or the like and pursuant to one or more, or a part of one or more, program elements, modules or objects generated from any programming language, such as C++, Java, Pl/1, Fortran or the like. And still further, each said step, or a file or object or the like implementing each said step, may be executed by special purpose hardware or a circuit module designed for that purpose.

15

Accordingly, the scope of protection of this invention is limited only by the following claims and their equivalents.

## CLAIMS

We claim:

1 1. A method for publishing a catalog, comprising the steps  
2 of:

3 receiving from a supplier via EDI a flat file catalog;

4 loading said catalog into a DB2 staging table;

5 allowing buyer audit control over selected fields in  
6 the staging table catalog while restricting buyer  
7 access to other fields;

8 updating a DB2 production table from said DB2 staging  
9 table; and

10 allowing a user read access to said DB2 production  
11 table.



1        2.    A requisition catalog administration method for  
2        providing control, audit, and publishing procedures for flat  
3        files received from suppliers, comprising the steps of:

4            receiving a catalog flat file from a supplier;

5            converting said flat file into a staging table having  
6            access control list controls over fields within said  
7            staging table;

8            controlling through a graphical user interface edit  
9            access authority to said staging table and through said  
10          access control list access to fields within said  
11          staging table;

12          responsive to input from a buyer granted access control  
13          list access to selected field in said staging table,  
14          updating said selected fields; and

15          responsive to buyer command, updating a production  
16          catalog with said staging table for read access by  
17          users in creating requisitions against said catalog.

1        3.    System for building and using a web catalog,



21 a web catalog function for presenting said production  
22 table to said requisition creation function.

1 4. The system of claim 3, said flat file comprising  
2 catalog items stored in a column delimited format.

1 5. The system of claim 3, further comprising EDI means for  
2 transferring said flat file through a firewall to said  
3 application server.

1 6. The system of claim 3, said graphical user interface  
2 comprising a process which loads a requisition catalog from  
3 a supplier into a production system.

1 7. The system of claim 3, said catalog administration  
2 function comprising hard coded access controls on the fields  
3 in said catalog.

1 8. Method for managing an enterprise requisition catalog,  
2 comprising:



1        9.    The method of claim 8, further comprising the steps of:  
2                responsive to said validating step determining an error  
3                in said flat file format or data, or responsive to said  
4                buyer non approving said data in said staging table,  
5                sending a reject message to said supplier.

1        10.   The method of claim 8, said fields of data in said  
2                staging table being selected for change based upon the level  
3                of authority granted by a role table to said buyer's web  
4                identifier.

1        11.   A program storage device readable by a machine,  
2                tangibly embodying a program of instructions executable by a  
3                machine to perform method steps for publishing a catalog,  
4                said method steps comprising:

5                receiving from a supplier via EDI a flat file catalog;

6                loading said catalog into a DB2 staging table;

7                allowing buyer audit control over selected fields in  
8                the staging table catalog while restricting buyer

9 access to other fields;

10 updating a DB2 production table from said DB2 staging  
11 table; and

12 allowing a user read access to said DB2 production  
13 table.

1 12. A program storage device readable by a machine,  
2 tangibly embodying a program of instructions executable by a  
3 machine to perform method steps for providing control,  
4 audit, and publishing procedures for flat files received  
5 from suppliers, said method steps comprising:

6 receiving a catalog flat file from a supplier;

7 converting said flat file into a staging table having  
8 access control list controls over fields within said  
9 staging table;

10 controlling through a graphical user interface edit  
11 access authority to said staging table and through said  
12 access control list access to fields within said  
13 staging table;

14 responsive to input from a buyer granted access control  
15 list access to selected field in said staging table,  
16 updating said selected fields; and

17 responsive to buyer command, updating a production  
18 catalog with said staging table for read access by  
19 users in creating requisitions against said catalog.

1     13. A program storage device readable by a machine,  
2     tangibly embodying a program of instructions executable by a  
3     machine to perform method steps for managing an enterprise  
4     requisition catalog, said method steps comprising:

```
5      extracting and reformatting supplier source data to
6      create a catalog flat file in an enterprise specified
7      column delimited format;
```

8 transmitting said flat file to an enterprise system;

9           accepting said flat file into an enterprise EDI  
10       mailbox;

```
11      reformatting, validating and storing catalog data from
12      said flat file into a into a staging table, with
```

13 catalog indicia into a catalog staging file and catalog  
14 parts indicia into a product staging file, and alerting  
15 a buyer;

16 presenting a graphical user interface to said buyer  
17 containing said catalog data and enabling said buyer to  
18 change selected fields of data in said staging table;  
19 and

20 responsive to buyer approval, migrating said staging  
21 table data into a production table access by a user in  
22 creating a requisition against said catalog.

1 14. A computer program product or computer program element  
2 for executing steps for providing control, audit, and  
3 publishing procedures for flat files received from suppliers  
4 by an enterprise requisition catalog system, said steps  
5 comprising:

6 receiving a catalog flat file from a supplier;

7 converting said flat file into a staging table having  
8 access control list controls over fields within said  
9 staging table;





**SYSTEM AND METHOD FOR CATALOG ADMINISTRATION USING SUPPLIER  
PROVIDED FLAT FILES**

**Abstract of the Disclosure**

A hybrid Notes/DB2 environment provides a requisition  
5 catalog on the Web. Client browsers are connected to a GWA  
infrastructure including a first network dispatcher and a  
virtual cluster of Domino.Go servers. The network  
dispatcher sprays out browser requests among configured  
.nsf servers in virtual server cluster. Communications from  
10 this virtual server cluster are, in turn, dispatched by a  
second network dispatcher servers in a Domino cluster.  
External objects, primarily for a GUI, are served in a .dfs  
and include graphic files, Java files, HTML images and  
net.data macros. The catalog is built from supplier  
15 provided flat files. A front end is provided for business  
logic and validation, as also is a relation database  
backend. HTML forms are populated using relational database  
agents. A role table is used for controlling access both to  
Notes code and DB2 data. Large amounts of data is quickly  
20 transferred using an intermediate agent and window.

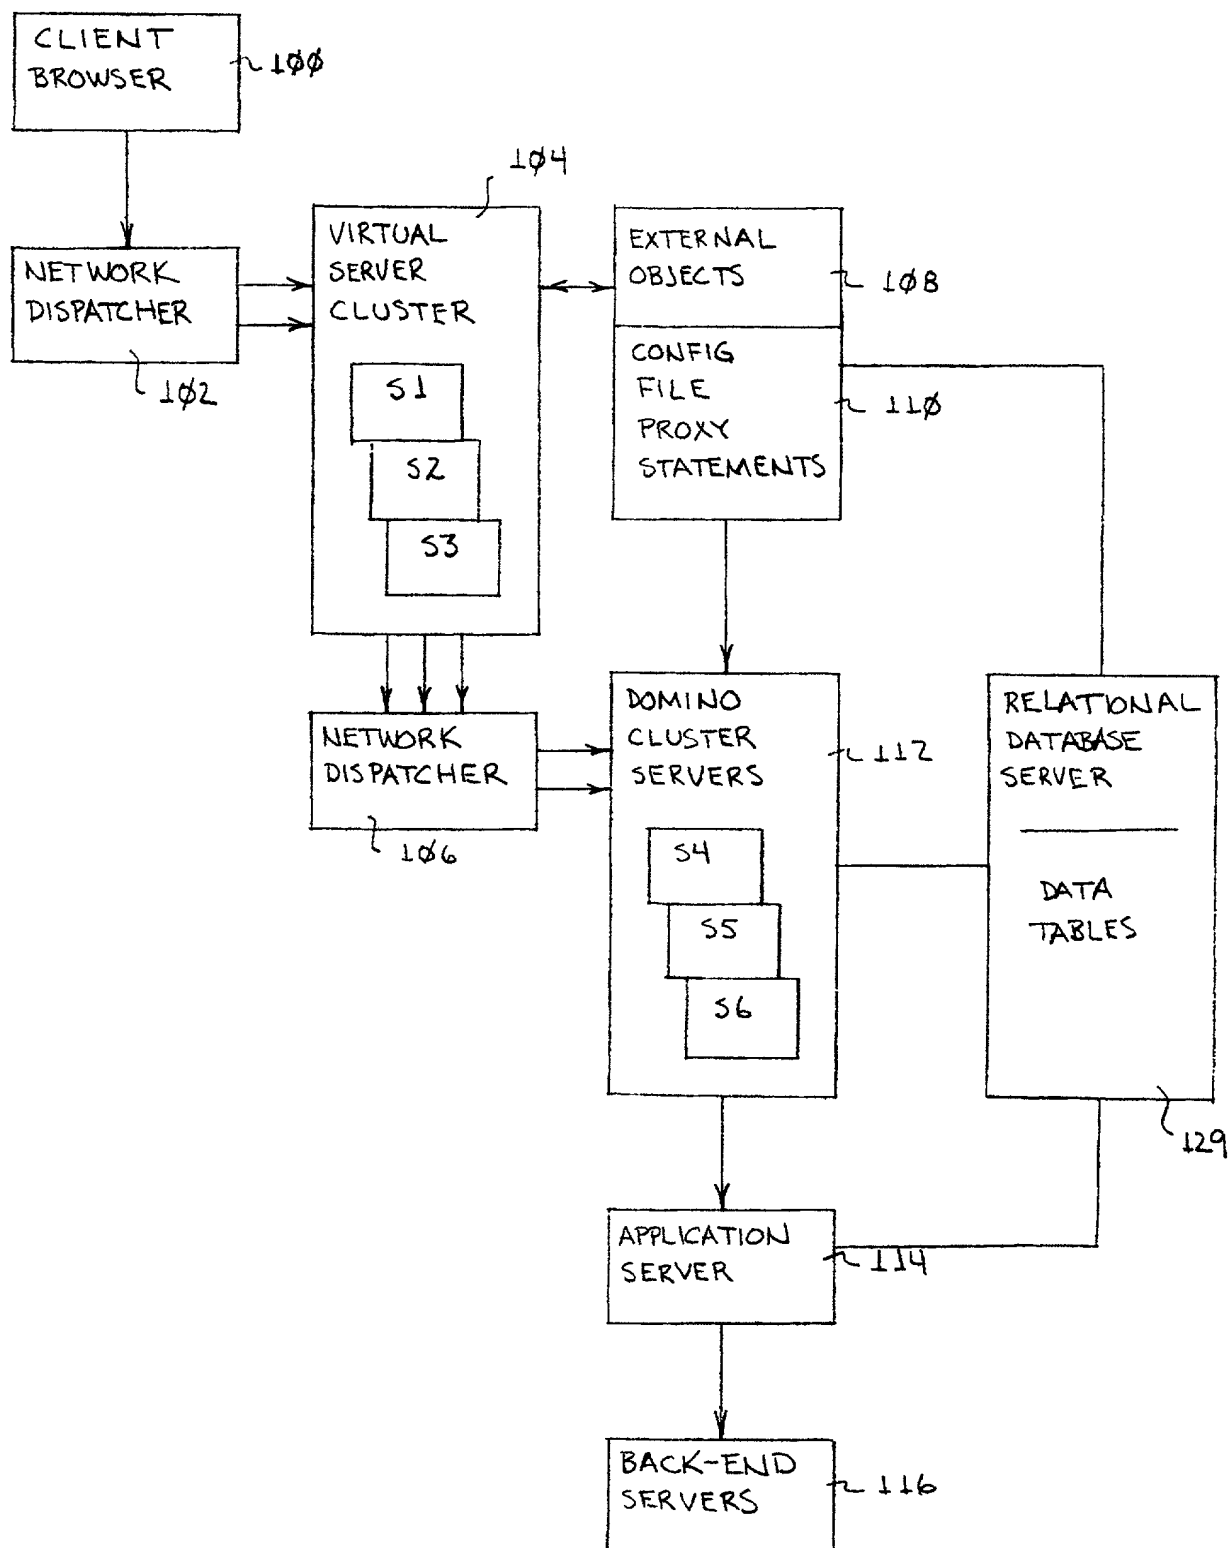


FIG. 1

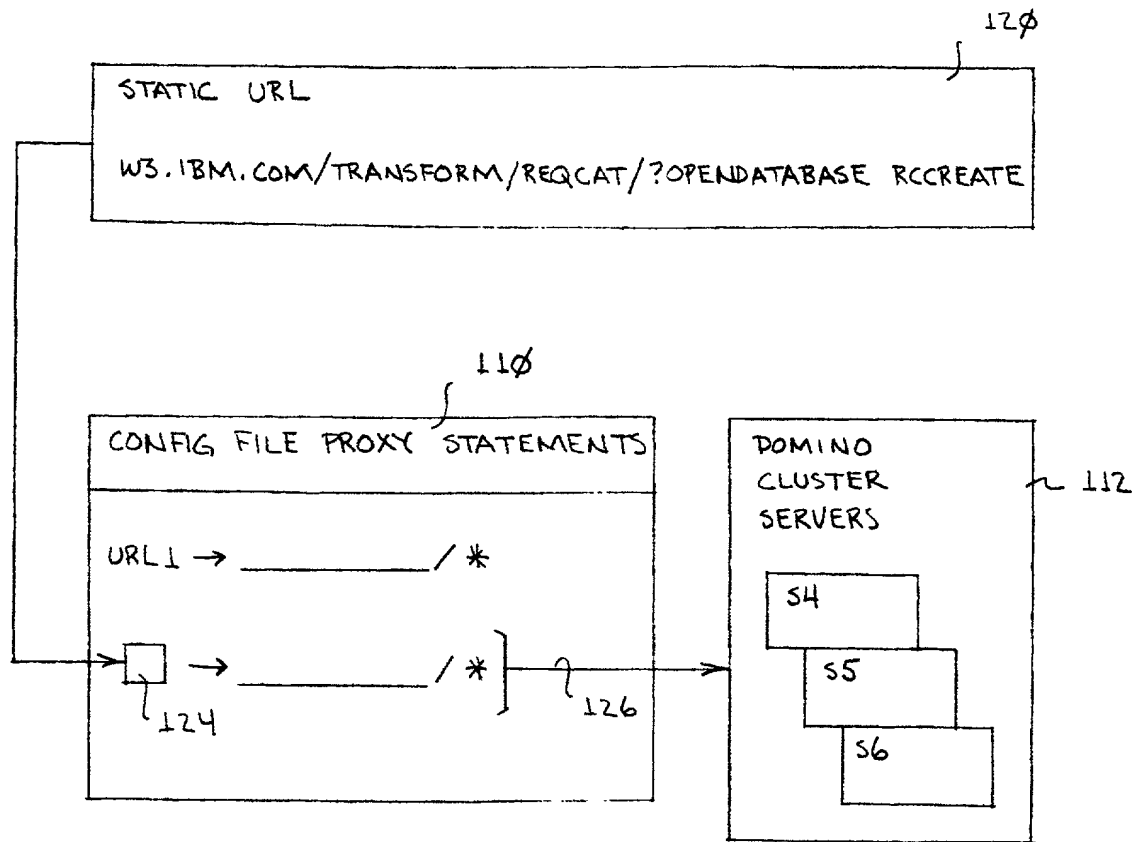



FIG. 2

[illegible]

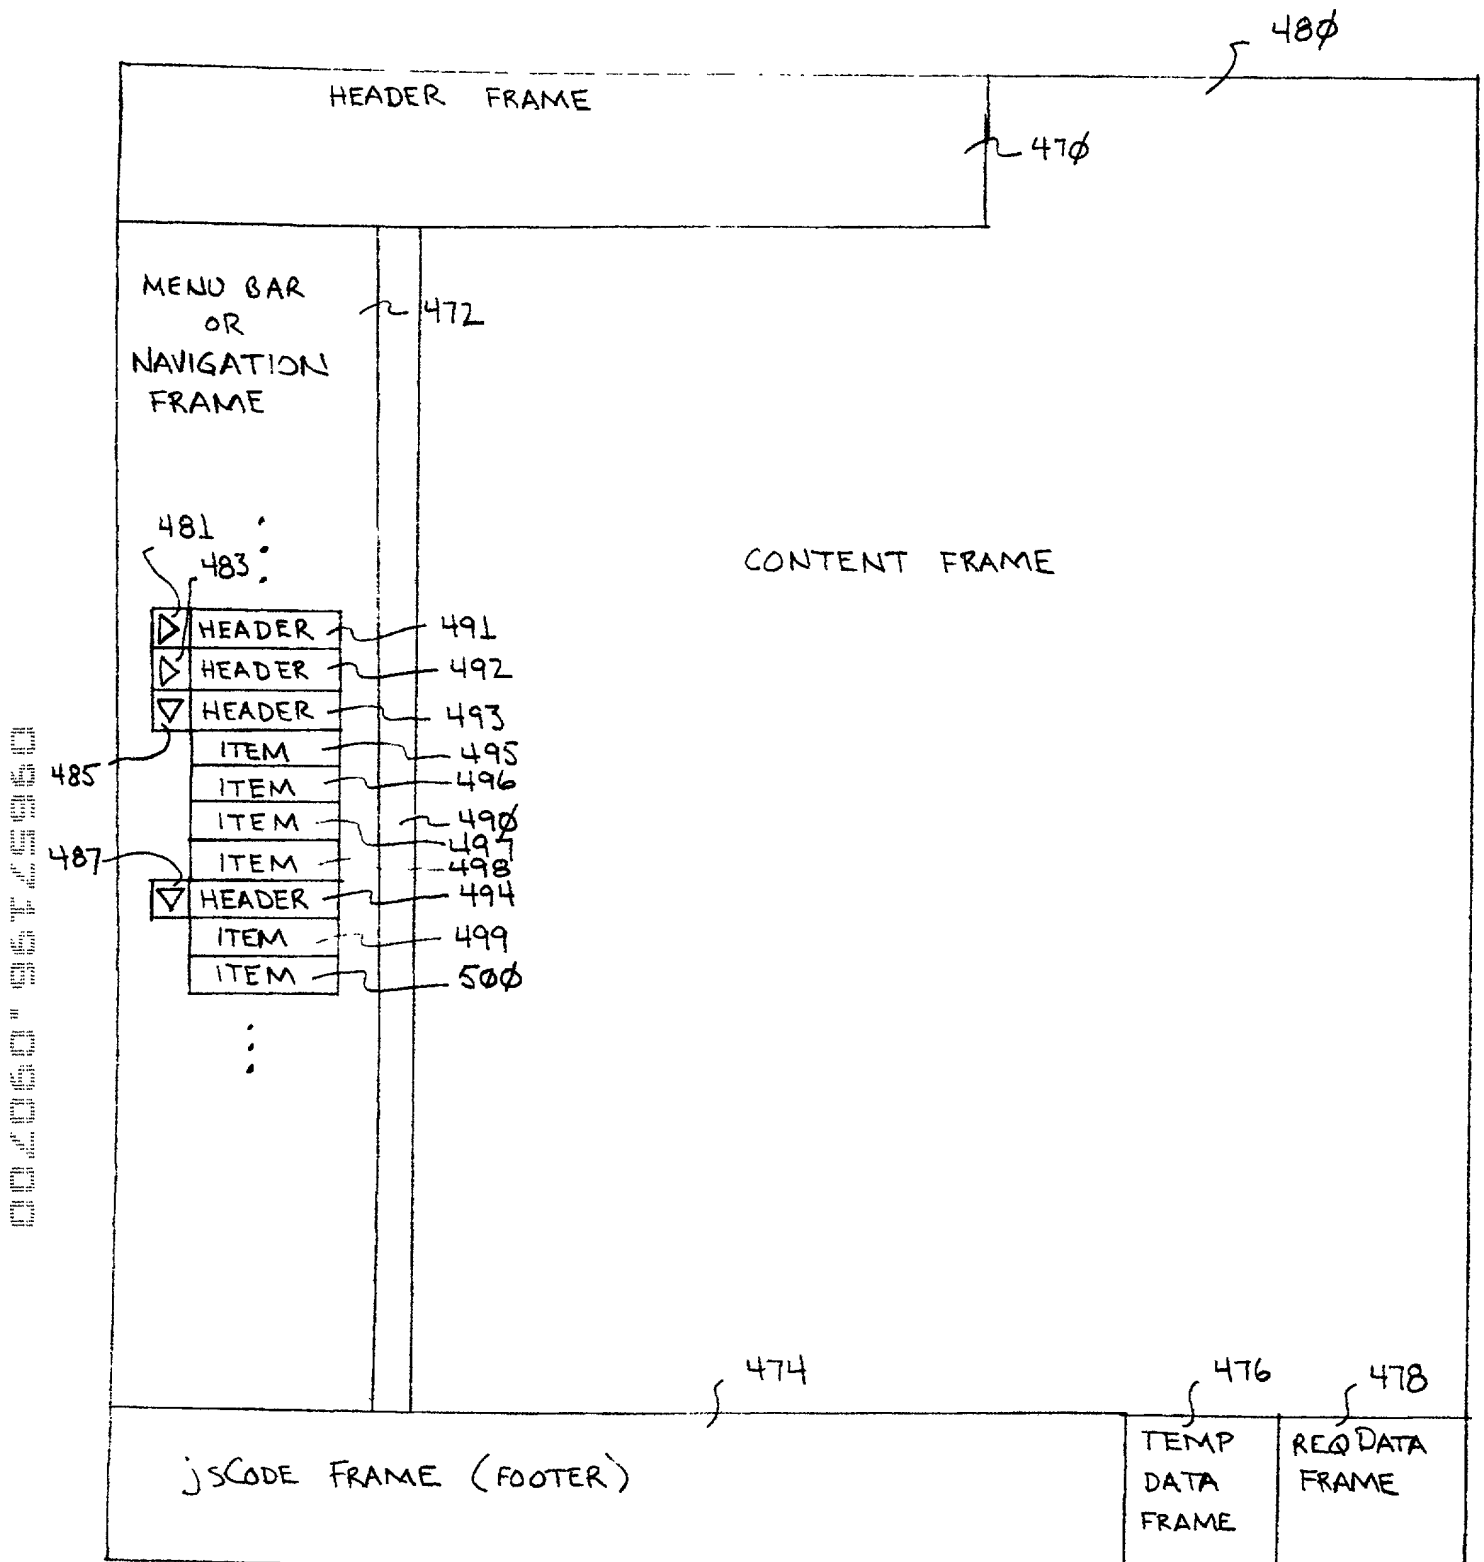


FIG. 4

IBM		Req/Cat Web		470		480	
* Create Requisition		Purchase Request					
* New New RFQ From Draft From Rej Req From Template From Comp RFQ		Requisition Summary Request Status: Request ID: Request Date: Internal/Resale: Total Price:					
* View Requisitions		Requester Summary: Requester Name: Initiator: Country: Company: Plant: Department:					
* For Approvers Only							
* Users							
* Administration							
...		Requisition Items:  472					
		<div>Shop For Terms</div> <div>Change Requester</div> <div>Close</div>					
w3.ibm.com	About IBM	Support	Search	Feedback	www.ibm.com	temp Data	req Data

FIG. 5

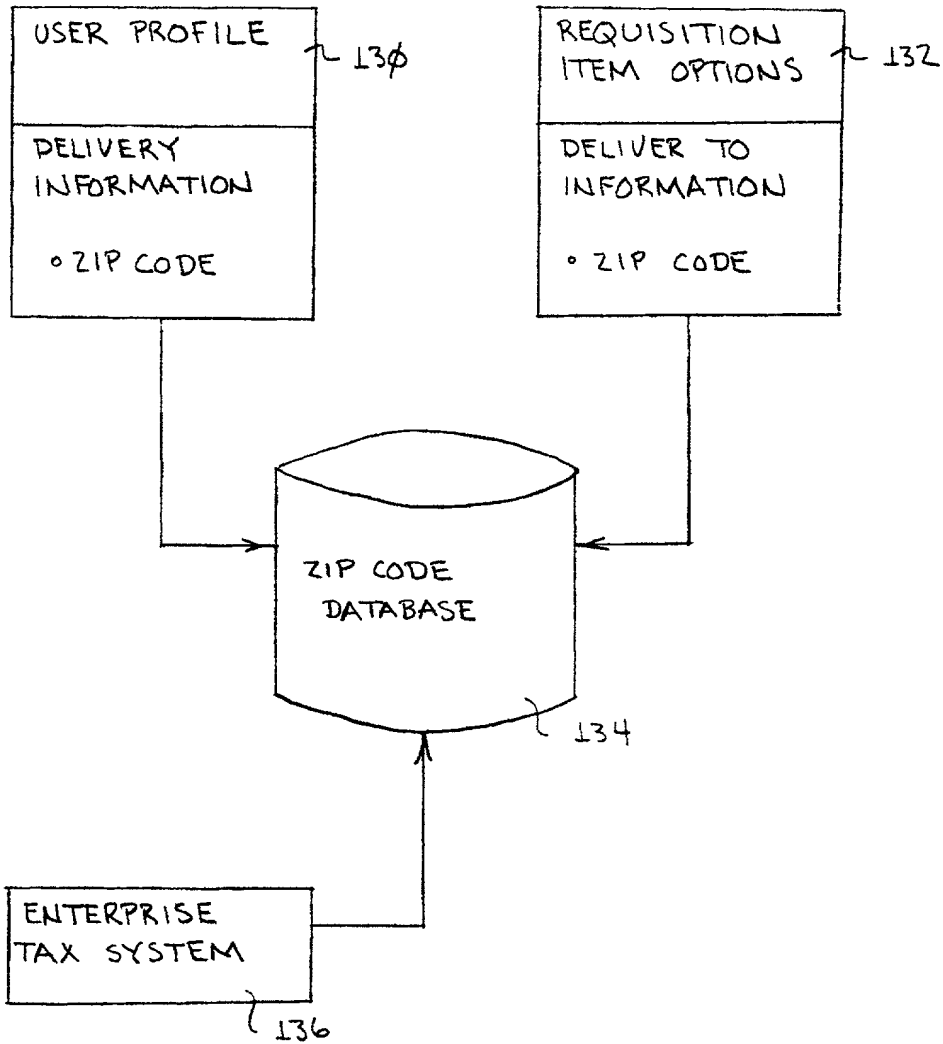


FIG. 6



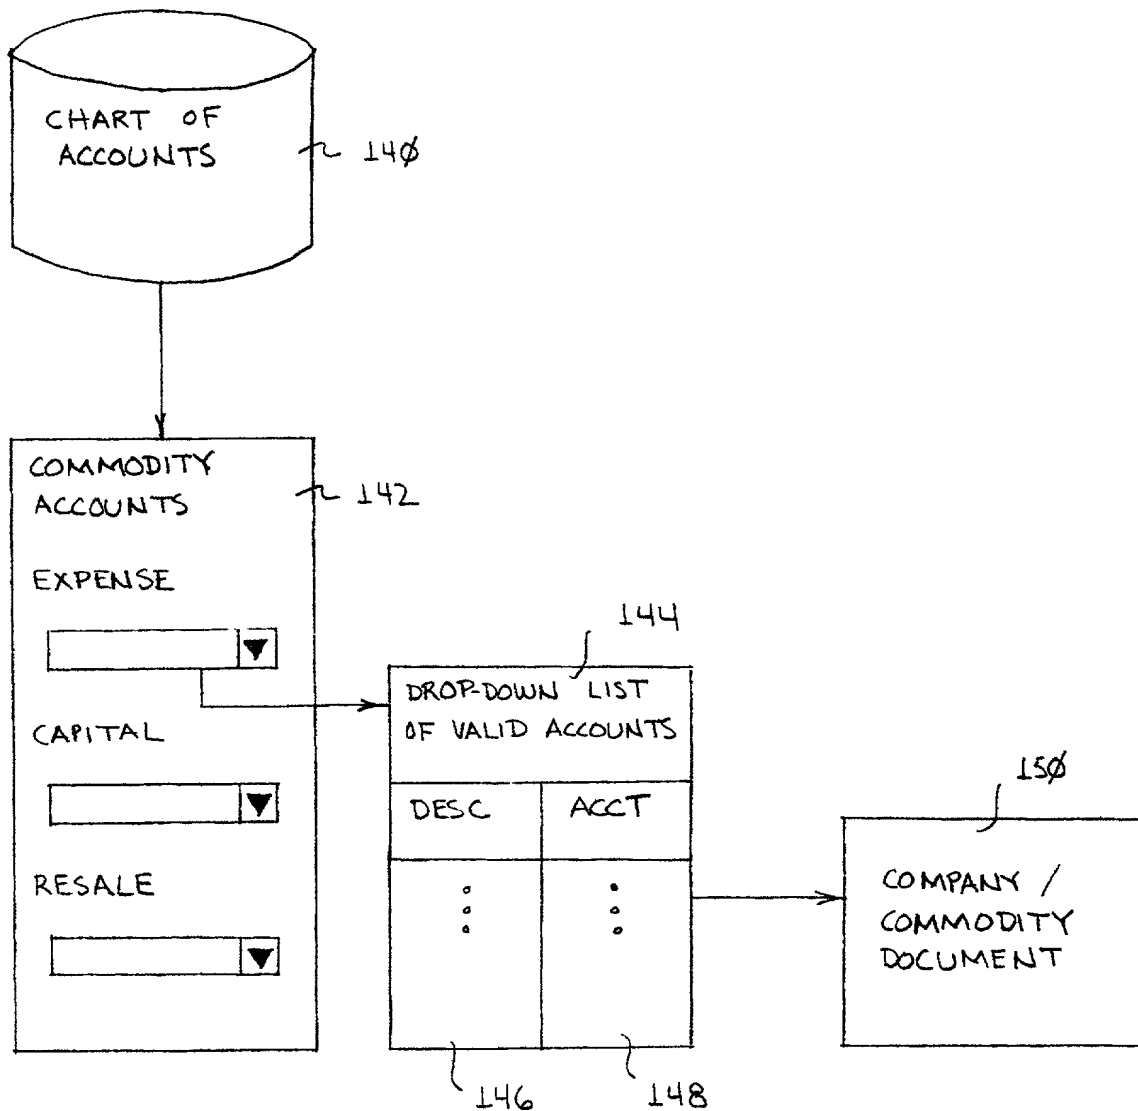


FIG. 7

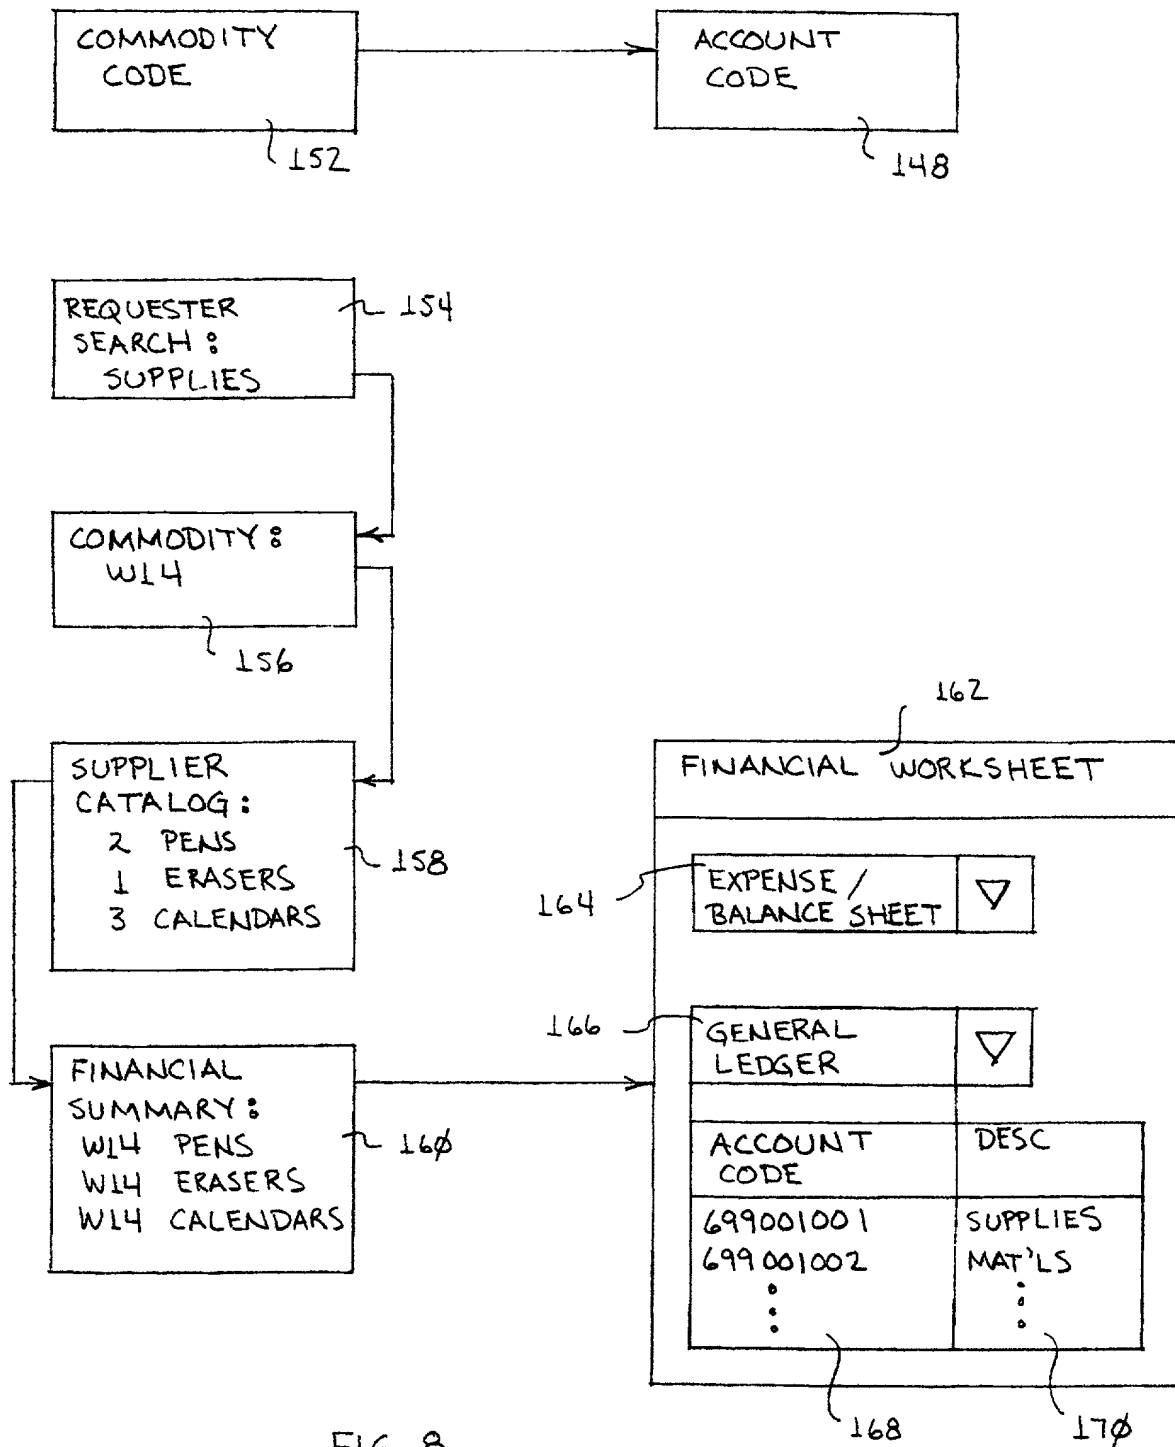





FIG. 8





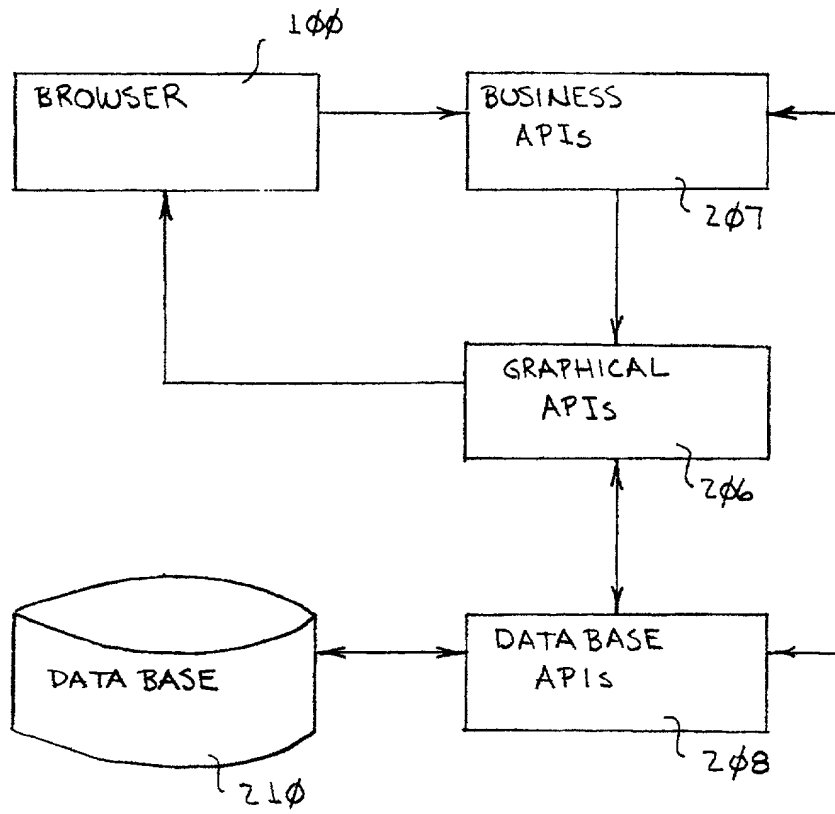



FIG. 12



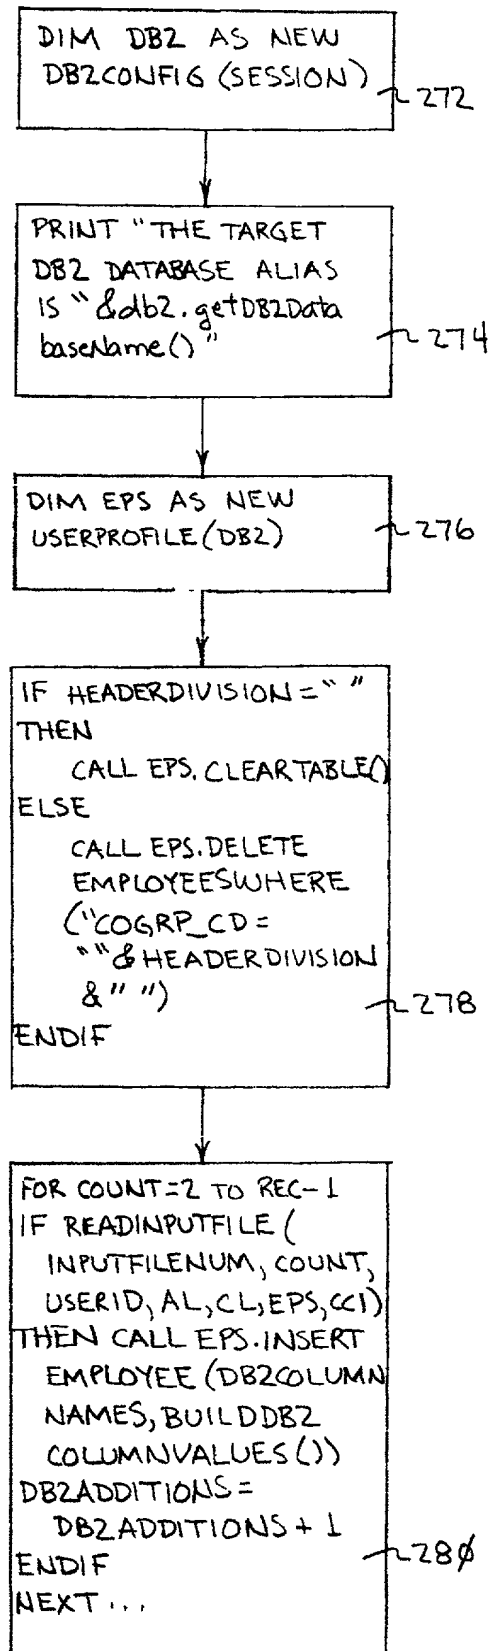


FIG. 14

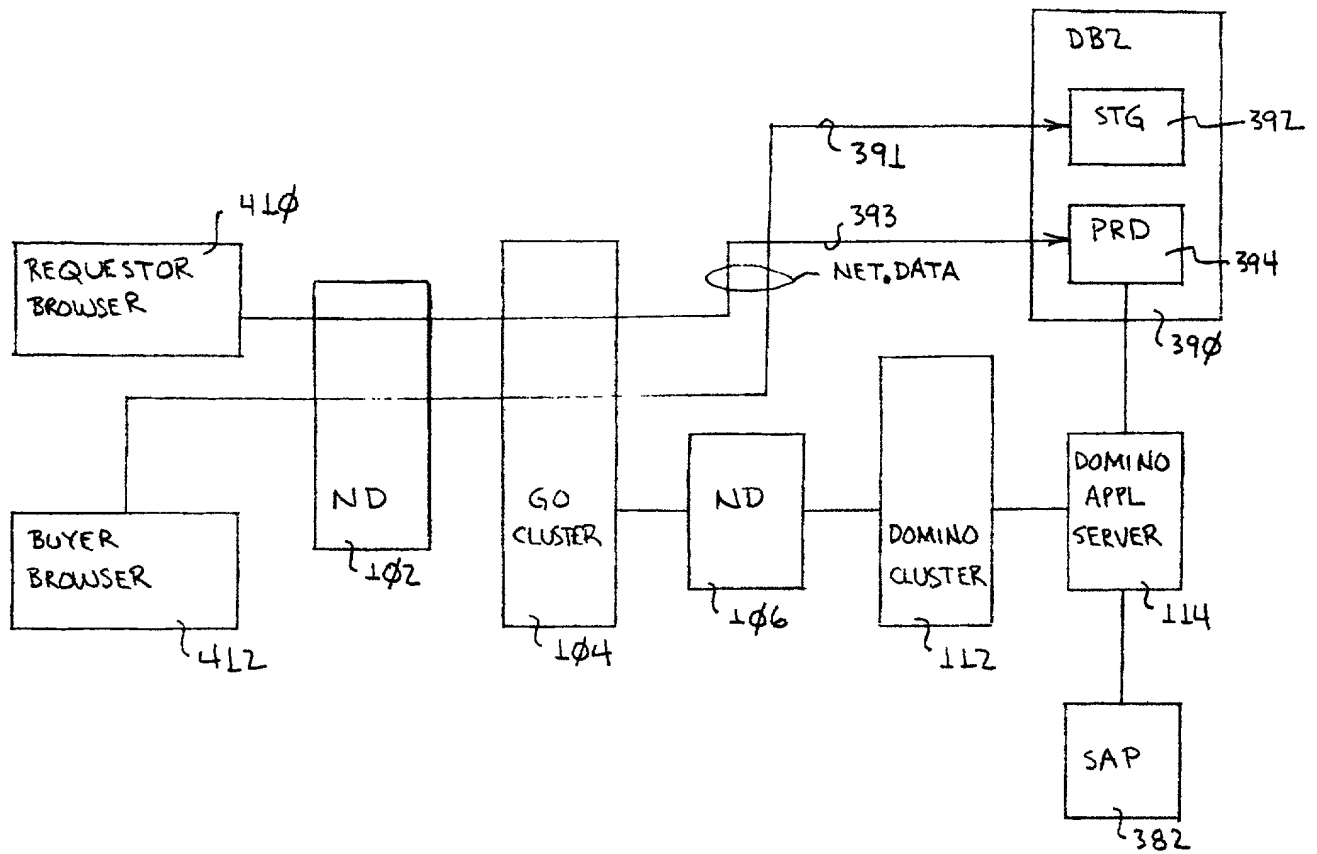


FIG. 15



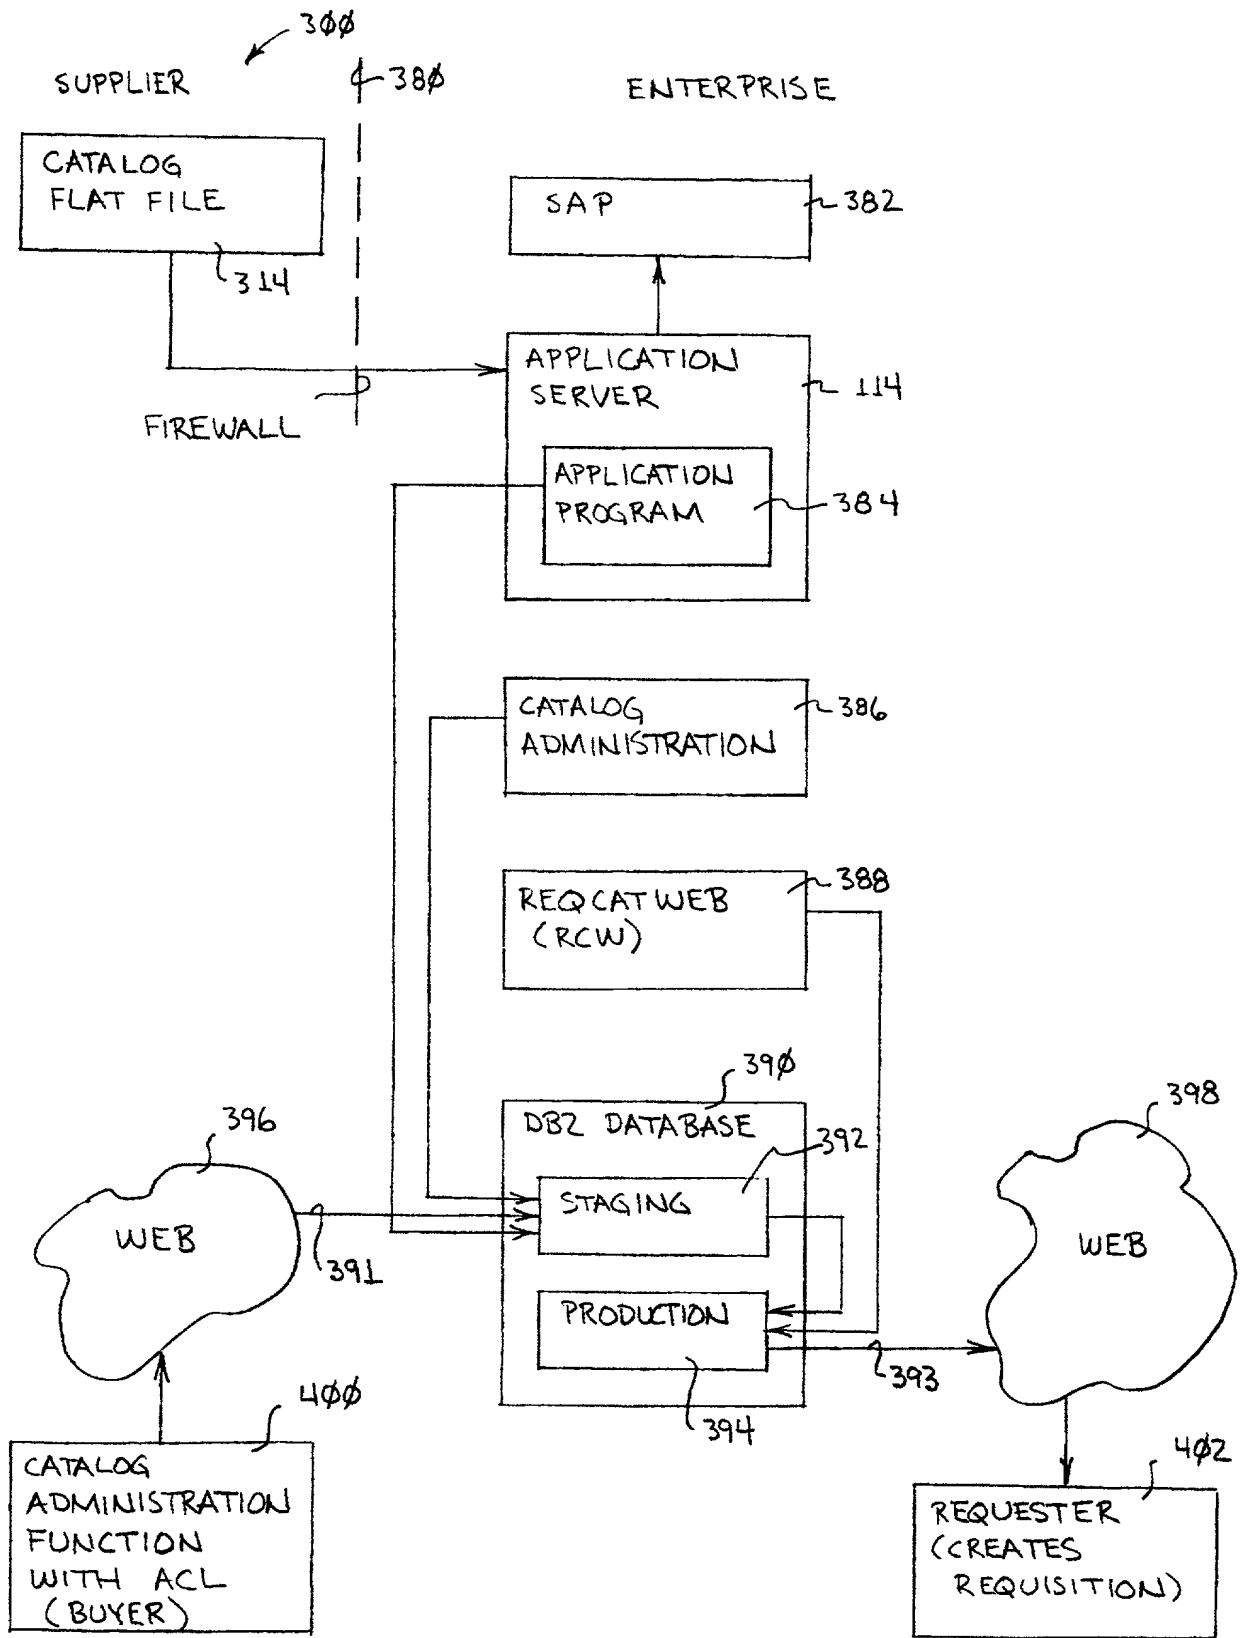


FIG. 16

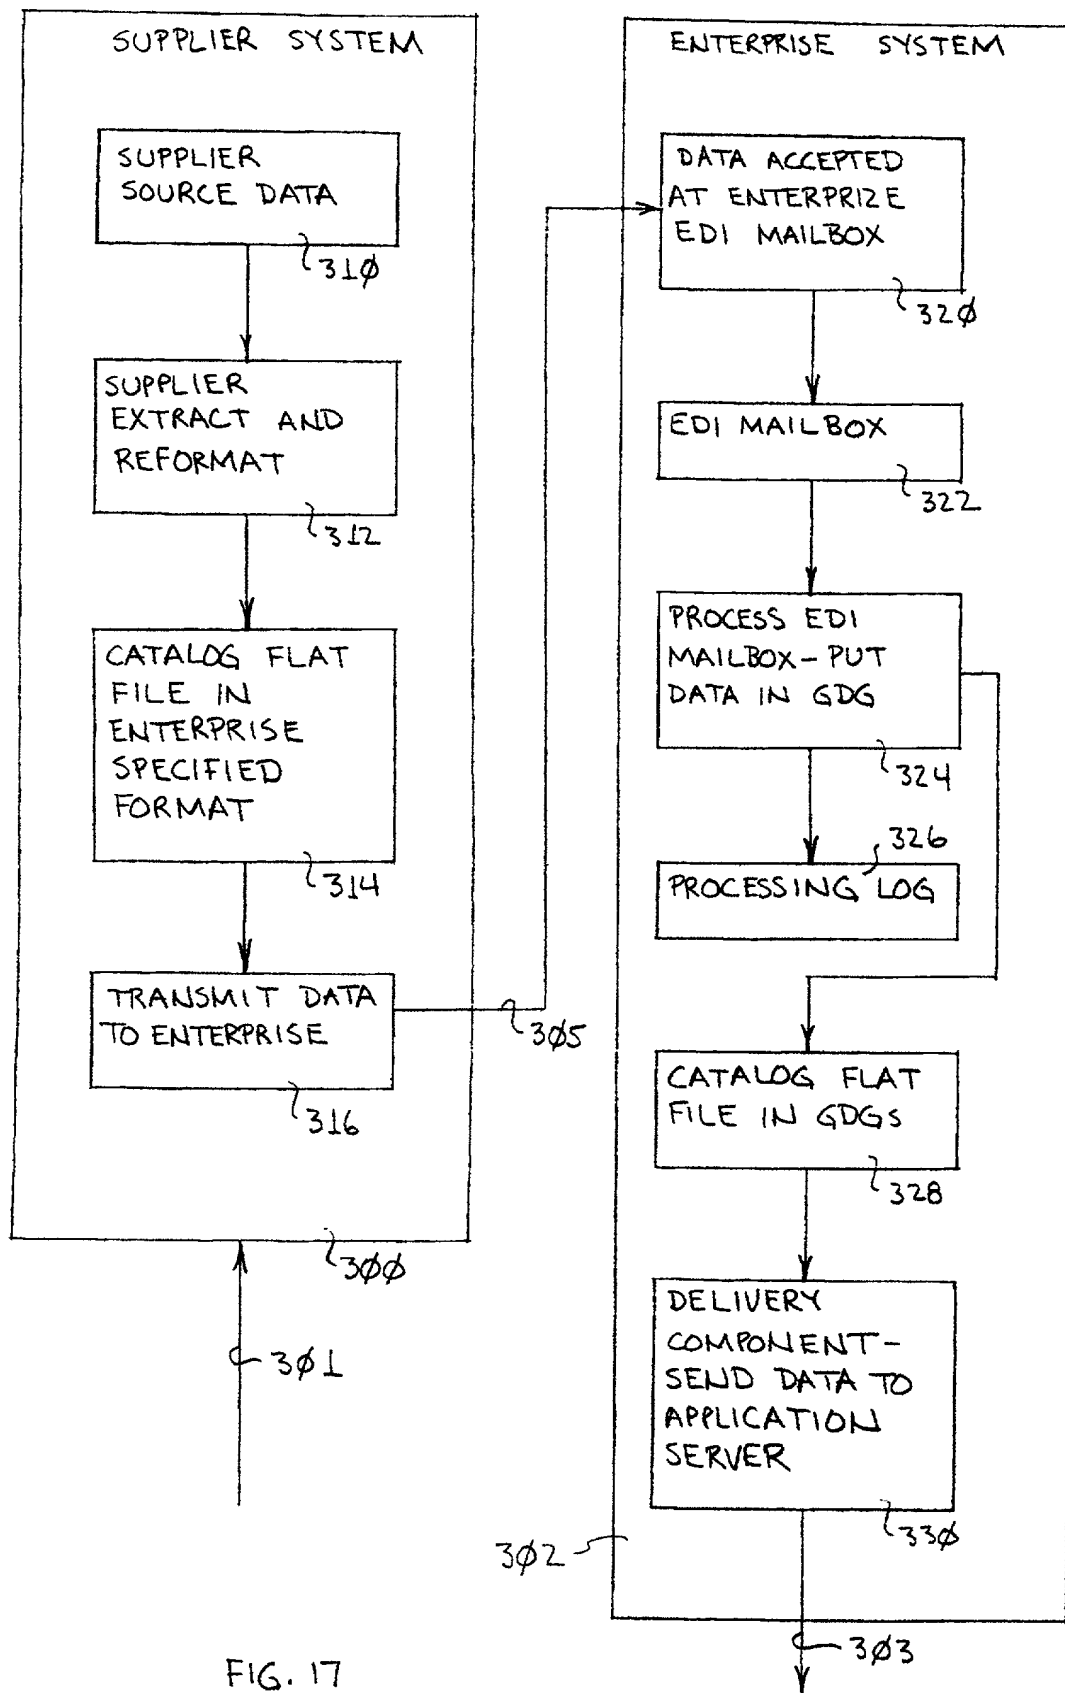
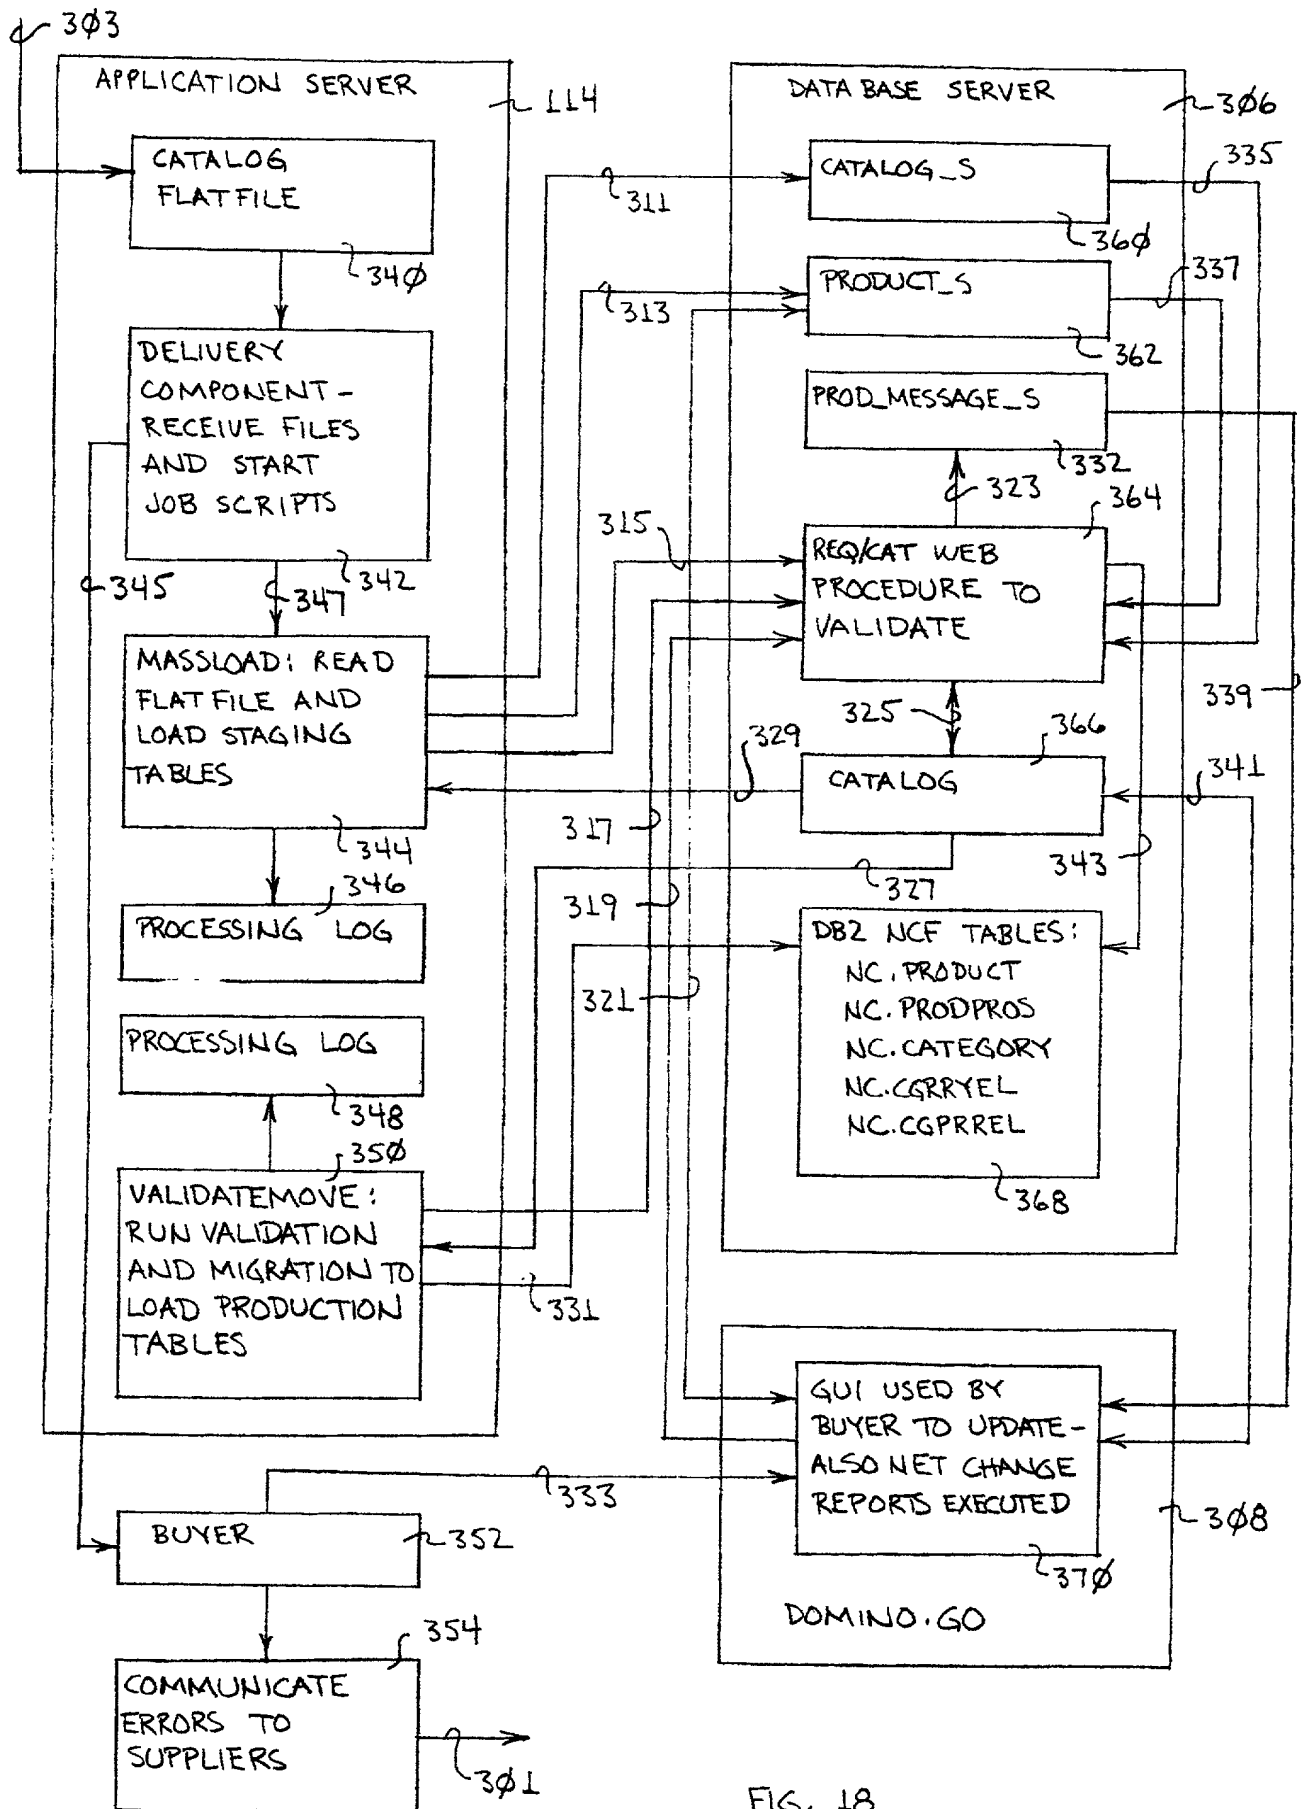


FIG. 17



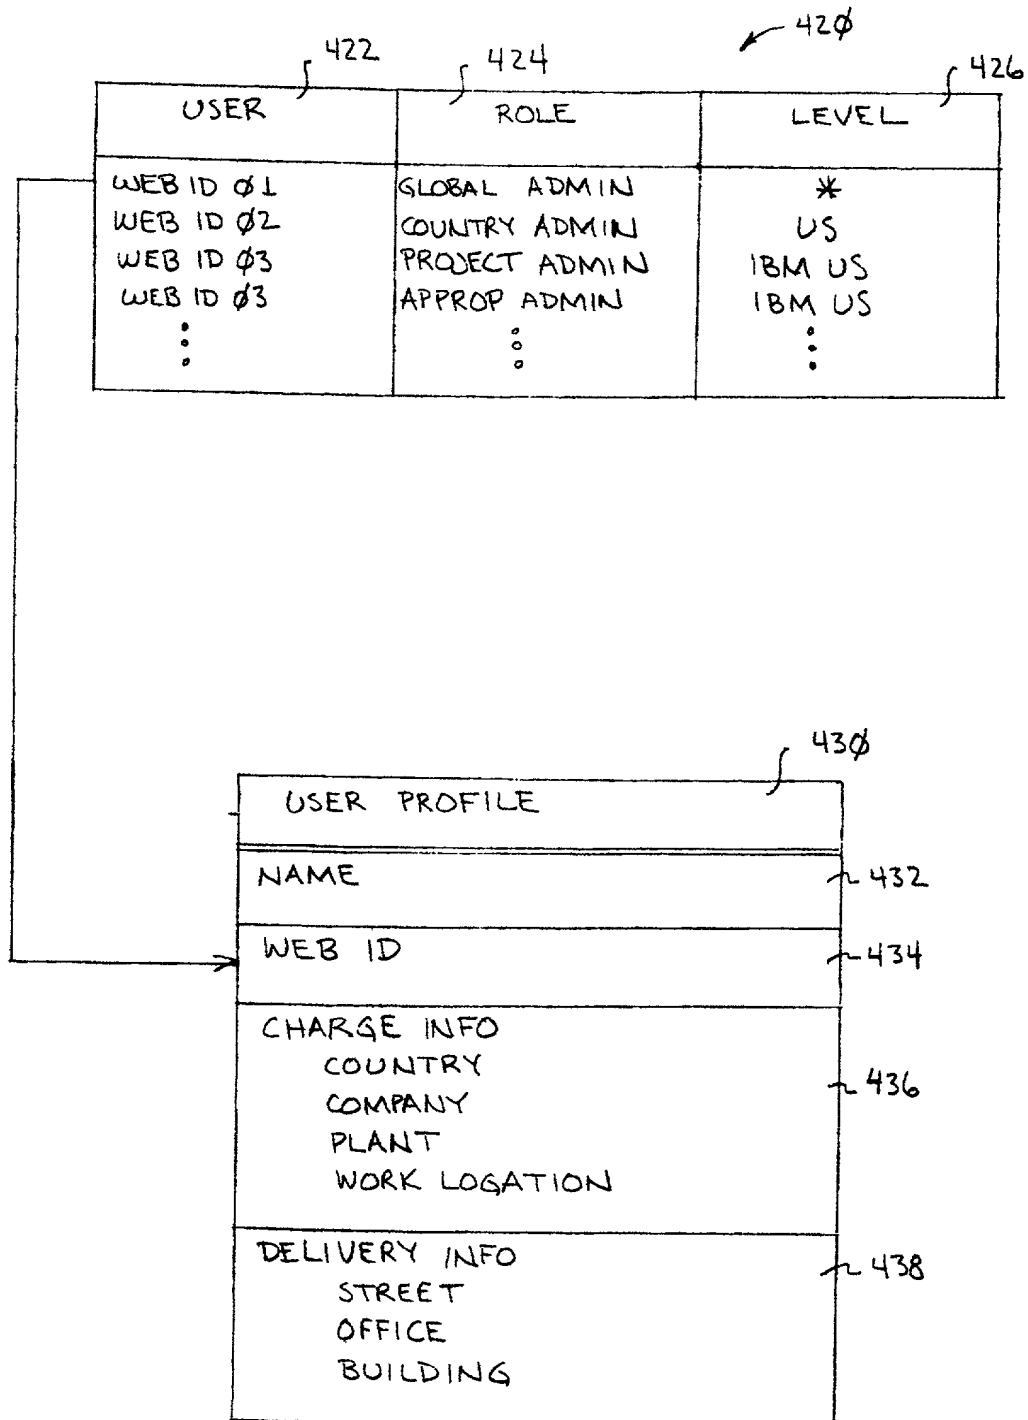


FIG. 19

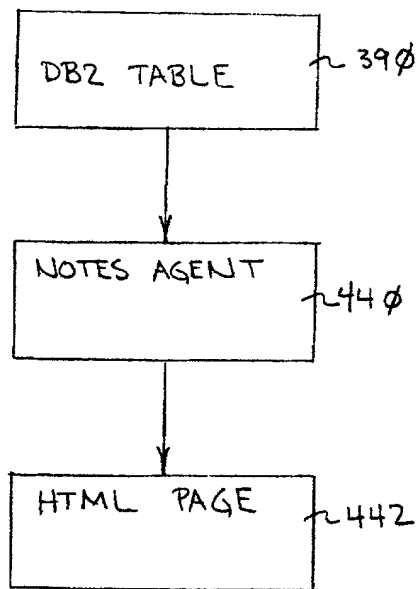


FIG. 20

2000-01-10 19:20

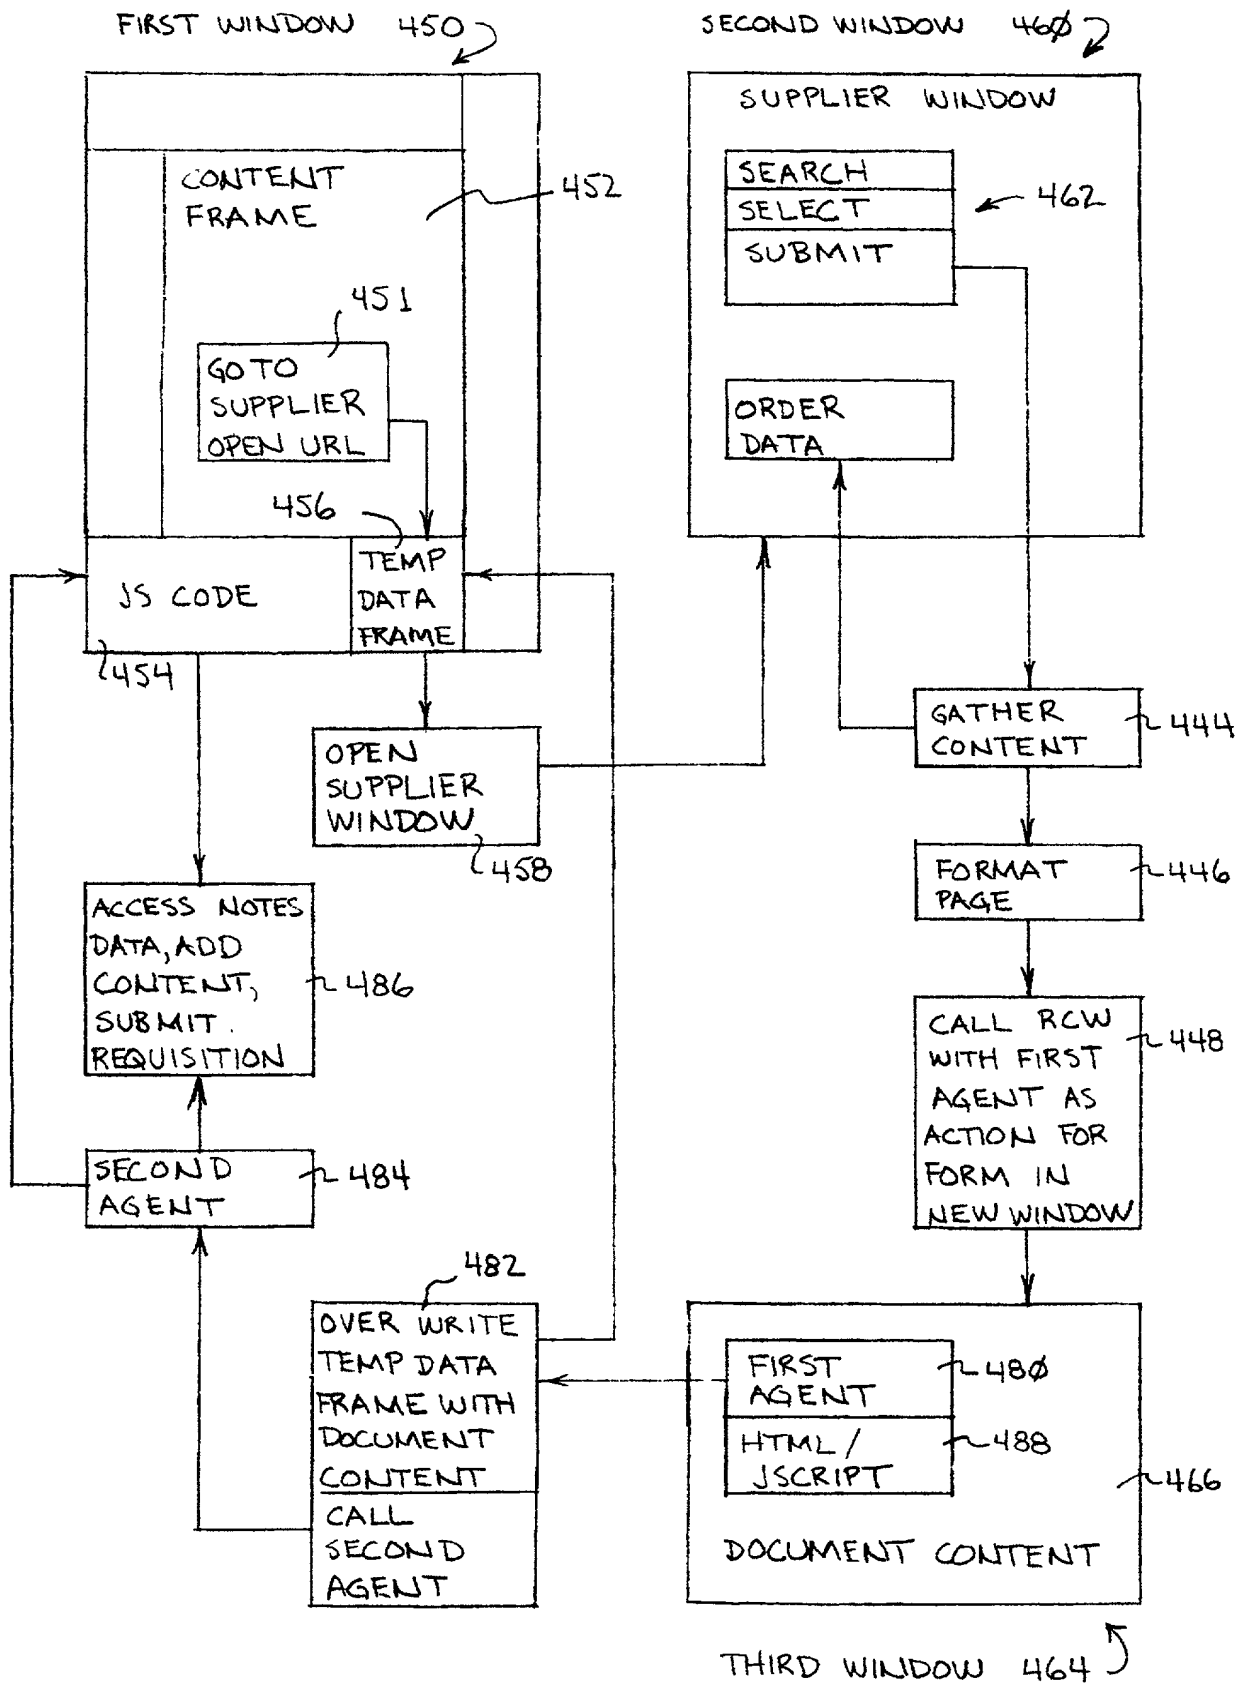


FIG. 21

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**System and Method for Catalog Administration Using Supplier Provided Flat Files**

the specification of which (check one)

  X   is attached hereto.

           was filed on                      as Application Serial No. or PCAT International Application No.                      and was amended on                      (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventors certificate, or PCAT International application having a filing date before that of the application on which priority is claimed::

Prior Foreign Application(s):

Number	Country	Date/Month/Year	Priority Claimed
--------	---------	-----------------	------------------

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below.

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under Title 35, United States Code, section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose information material to patentability of this application as defined in 37 CFR Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.	Filing Date	Status (patented, pending, abandoned)
------------	-------------	---------------------------------------

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: David L. Adour, Reg. No. 29,604; Lawrence R. Fraley, Reg. No. 26,885; John R. Pivnichny, Reg. No. 43,001; Arthur J. Samodovitz, Reg. No. 31,297; William H. Steinberg, Reg. No. 28,540; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John H. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; and Shelley M Beckstrand, Reg. No. 24,886.

Send all correspondence to: Shelley M Beckstrand, P.C.  
 Attorney at Law  
 314 Main Street  
 Owego, NY 13827  
 Direct telephone calls to: (607) 687-9913 [alt: (607) 755-3268]

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Inventor: David G. Ruest

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: 1120 Ford Road, Vestal, New York 13850  
 Citizenship: USA  
 Post Office Address: Same as residence

(2) Inventor: Amy J. Snavelly

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: 2260 Mill Road, Binghamton, New York 13903  
 Citizenship: USA  
 Post Office Address: Same as residence

(3) Inventor: Mark A. Musa

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: RR1 Box 3051, Brackney, Pennsylvania 18812  
 Citizenship: USA  
 Post Office Address: Same as residence

(4) Inventor:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence:  
 Citizenship:  
 Post Office Address: